Diffusion of Networking Technologies
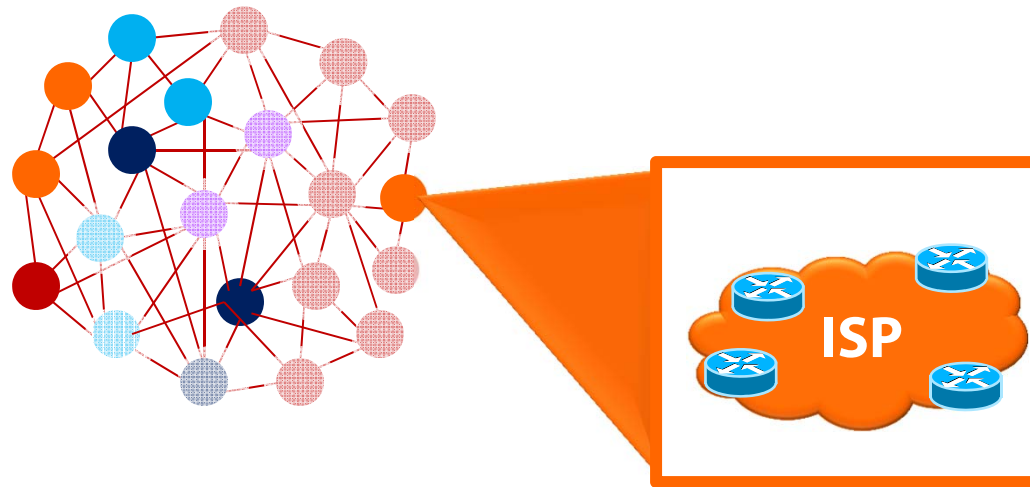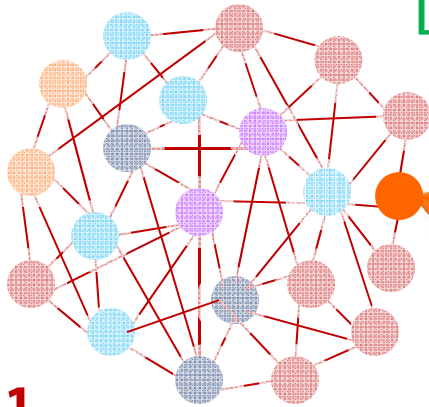

Sharon Goldberg
Boston University

Electronic Commerce (EC'12)
Valencia, Spain
June 7, 2012

Diffusion in social networks: Linear Threshold Model

[Kempe Kleinberg Tardos'03, Morris'01, Granovetter'78]

A node's utility depends only on its neighbors!

I'll adopt the innovation if θ of my friends do!

$θ = 1$
$θ = 2$
$θ = 3$
$θ = 4$
$θ = 6$

Optimization problem [KKT'03]: Given the graph and thresholds, what is the smallest seedset that can cause the entire network to adopt?

Seedset: A set of nodes that can kick off the process.
Marketers, policy makers, and spammers can target them as early adopters!

Today's questions:
Where did this theory come from?
Can it be applied to networking technologies?
What are these networking technologies?

Tutorial Plan

- Classical foundations of diffusion modeling
  - Diffusion of Innovations (Social Sciences) **[Everett '62, '03]**
  - "Bass Model" and extensions (Marketing) **[Bass '69]**
  - Network externalities or effects (Economics)**[Farrell, Saloner '86], [Choi '94]**

- Quick interlude - Internet economics

- Networking technologies
  - IPv6 and the challenge of adopting an incompatible technology
  - IPsec – a success story
  - BGPsec and the challenge of coordinating independent agents
  - DNSSEC – quick overview of a rollout this happening right now.

Why should you care?

1. EC community has expertise in diffusion problems on graphs.
   – Most of these problem involve network `externalities' with graph structure.

2. This is a real problem the practitioners care about **right now**.
   1. DNSSEC rollout is ongoing since 2005.
   2. BGPsec is currently being standardized and will be rolled out in ~ 5 years.
   3. World IPv6 launch day happened yesterday!

As academics, we can help answer policy question of how to rollout these technologies. There is surprisingly little work in this area.

Diffusions of Innovations Theory (social sciences)

"Diffusion is the process by which an innovation is communicated through certain channels over time by members of a social system." [Rogers 2003]

Social system:

- Social norms
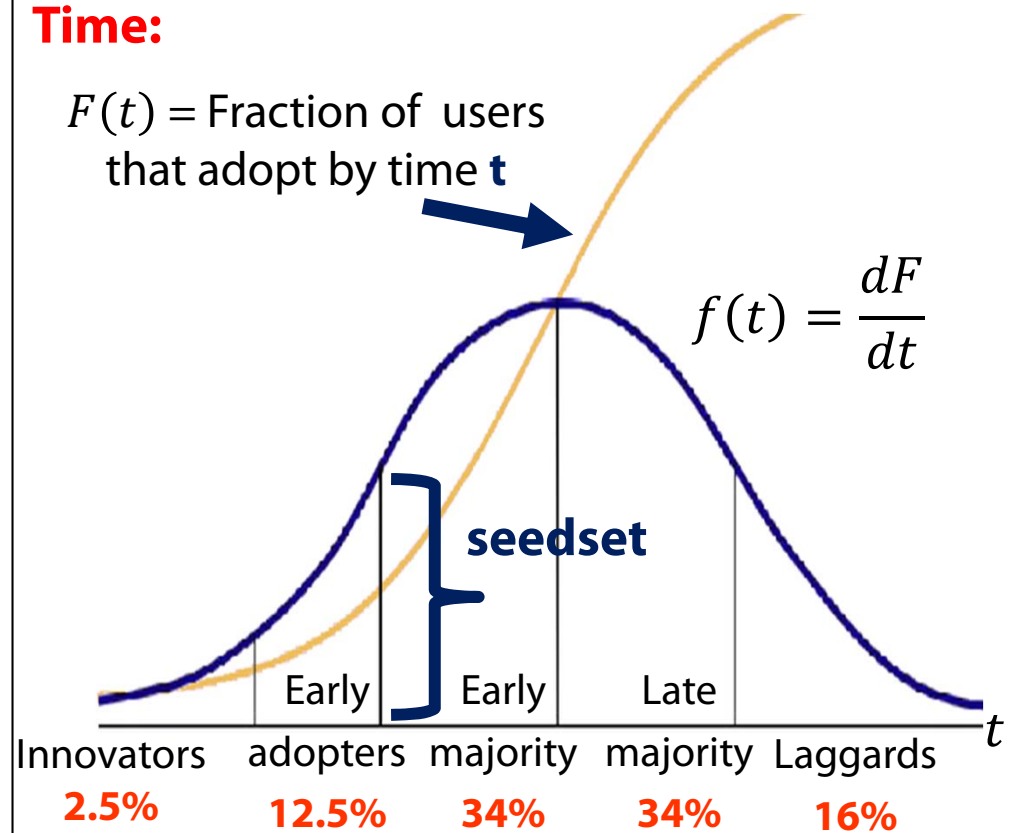- "Opinion leadership" (power & position in social network)

Communication channels:

- Mass media
- Interpersonal communication

Innovation characteristics

- Relative advantage
- Compatibility
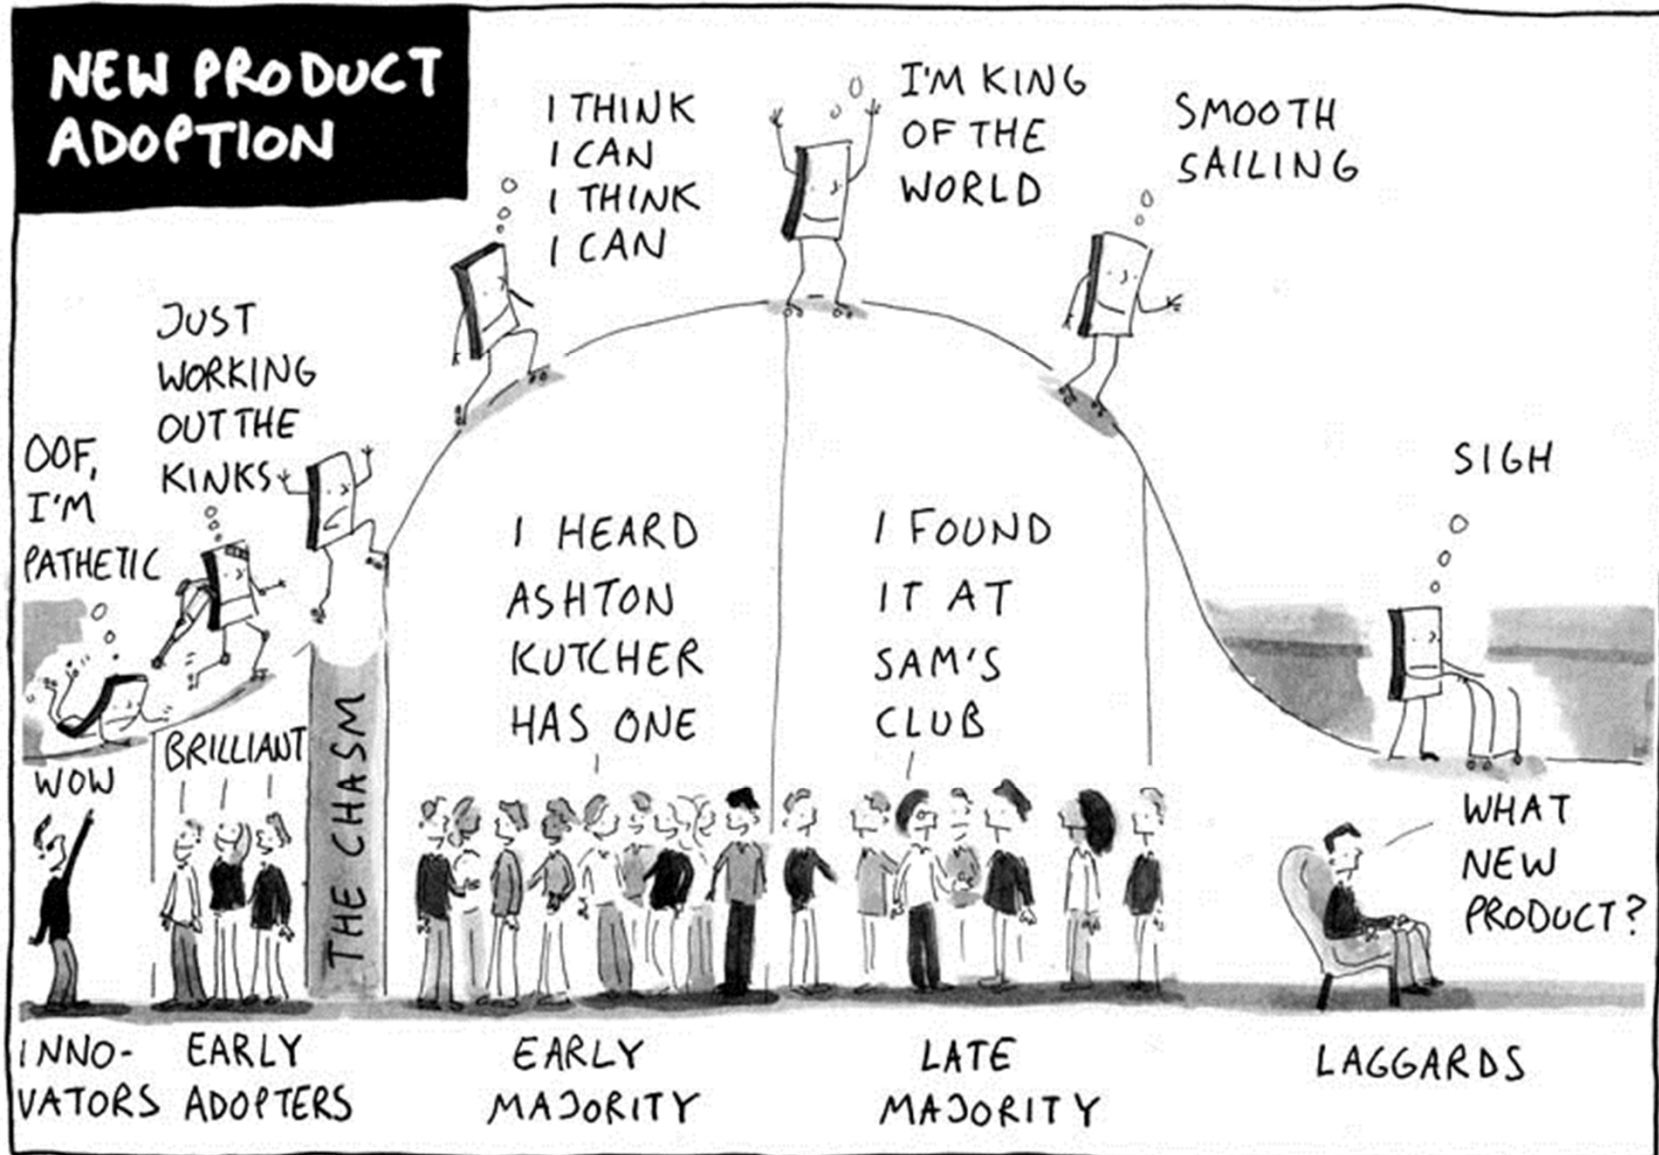- Complexity
- Trialability
- Observability

Time:

$F(t) =$ Fraction of users that adopt by time **t**

$$f(t) = \frac{dF}{dt}$$

seedset

Innovators	Early adopters	Early majority	Late majority	Laggards
2.5%	12.5%	34%	34%	16%

- **Usually:** an individual's decisions are influenced by past adopters decisions

Image: Wikipedia

Diffusions of Innovations Theory (social sciences)

Diffusions of Innovations Theory (social sciences)

- Pioneered by rural sociologists **[Ryan&Gross 1949]**

- Uses to understand why some innovations take off, but others don't

- … to understand impact of communication channel use

- … to categorize "innovativeness" of organizations / individuals, etc

- 100's of studies of innovations e.g. seed corn, new drugs, HIV prevention, sanitization, photovoltaics, fax, computers, Internet, video games, …
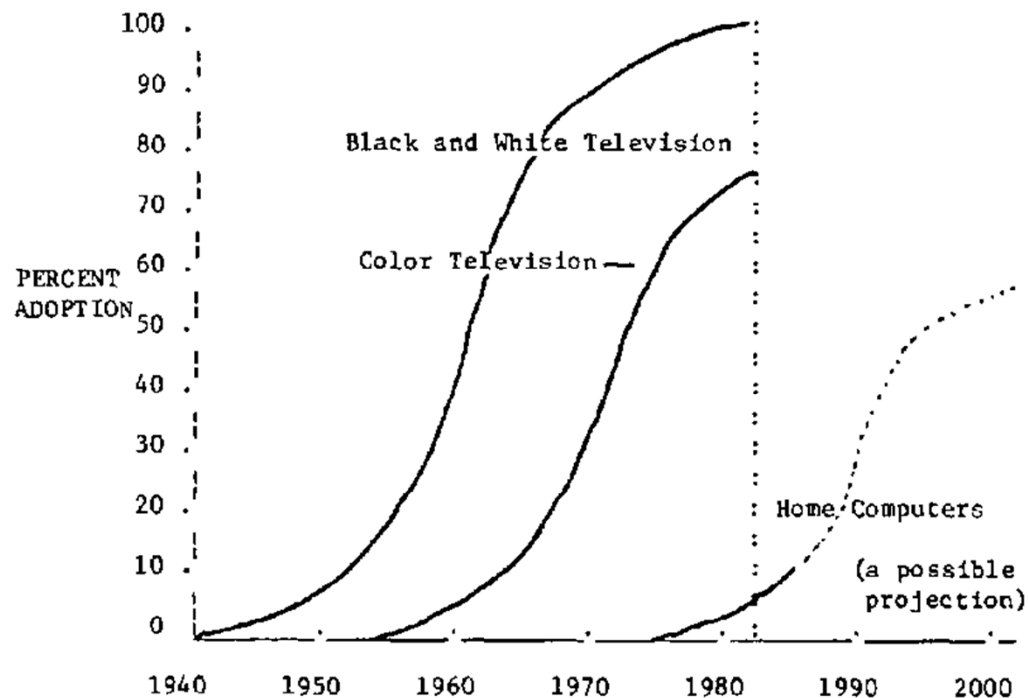

Figure 1. Diffusion Curves for the Adoption of Three Household Communication Technologies.
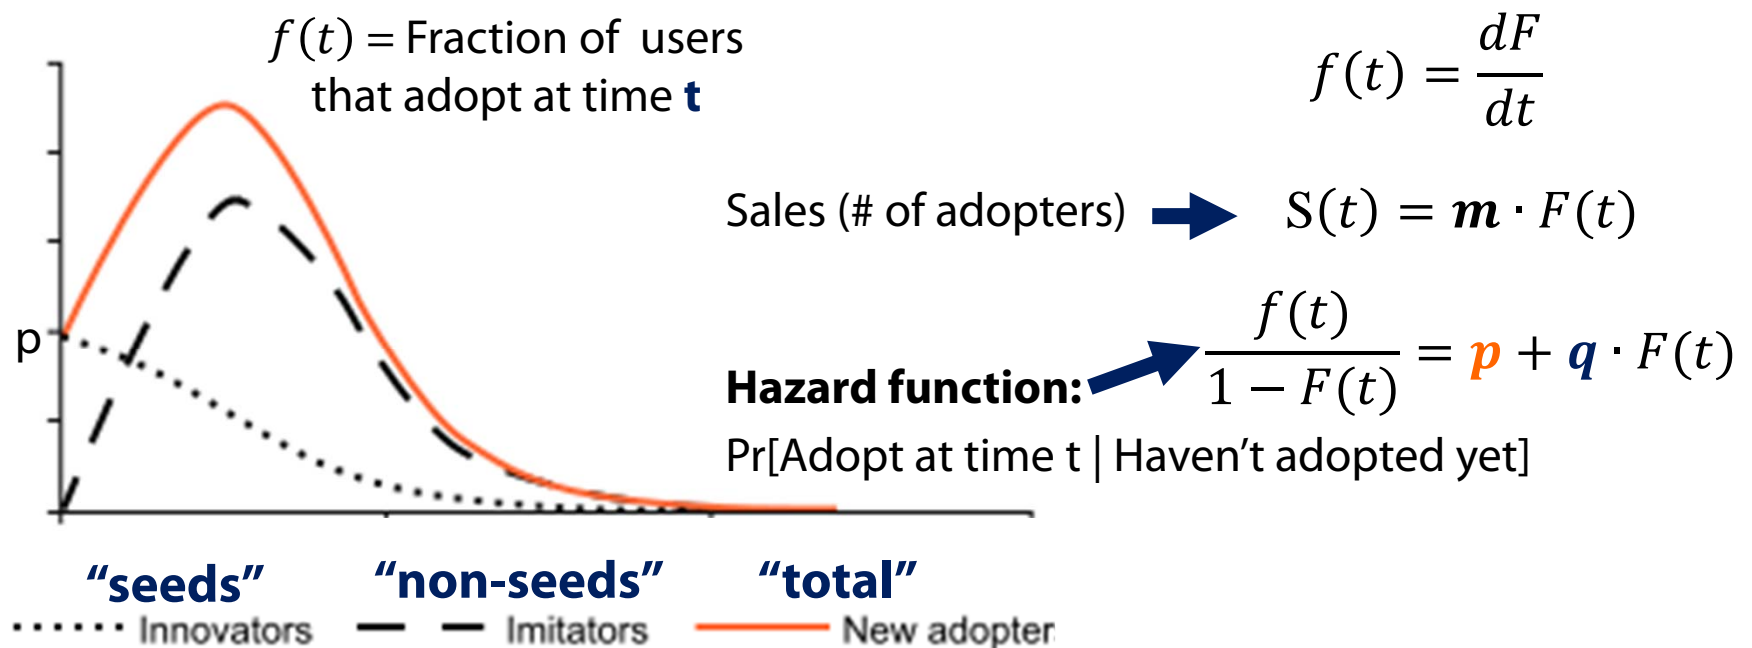
Source: Rogers. "The Diffusion of Home Computers Among Households in Silicon Valley" (1985)

The Bass Model (marketing)

- **[Bass 1969] Three parameter diffusion model:**
  - *p* (coefficient of innovation / external influence / external marketing)
  - *q* (coefficient of imitation / internal influence / "word of mouth")
  - *m* (market potential / max number of possible adopters)

$f(t)$ = Fraction of users that adopt at time **t**

$$f(t) = \frac{dF}{dt}$$

Sales (# of adopters) $\longrightarrow$ $S(t) = \boldsymbol{m} \cdot F(t)$

Hazard function: $\longrightarrow$ $\dfrac{f(t)}{1 - F(t)} = \boldsymbol{p} + \boldsymbol{q} \cdot F(t)$

Pr[Adopt at time t | Haven't adopted yet]

"seeds"   "non-seeds"   "total"

⋯⋯ Innovators   — — Imitators   —— New adopter

- "The most popular model in the field of marketing" **[Dekimpe]**
- Used to forecast extent of diffusion, and how pricing, marketing mix effects it
- … and for normative and descriptive purposes (e.g. pricing, timing strategies)

Norton-Bass Model (marketing successive generations)

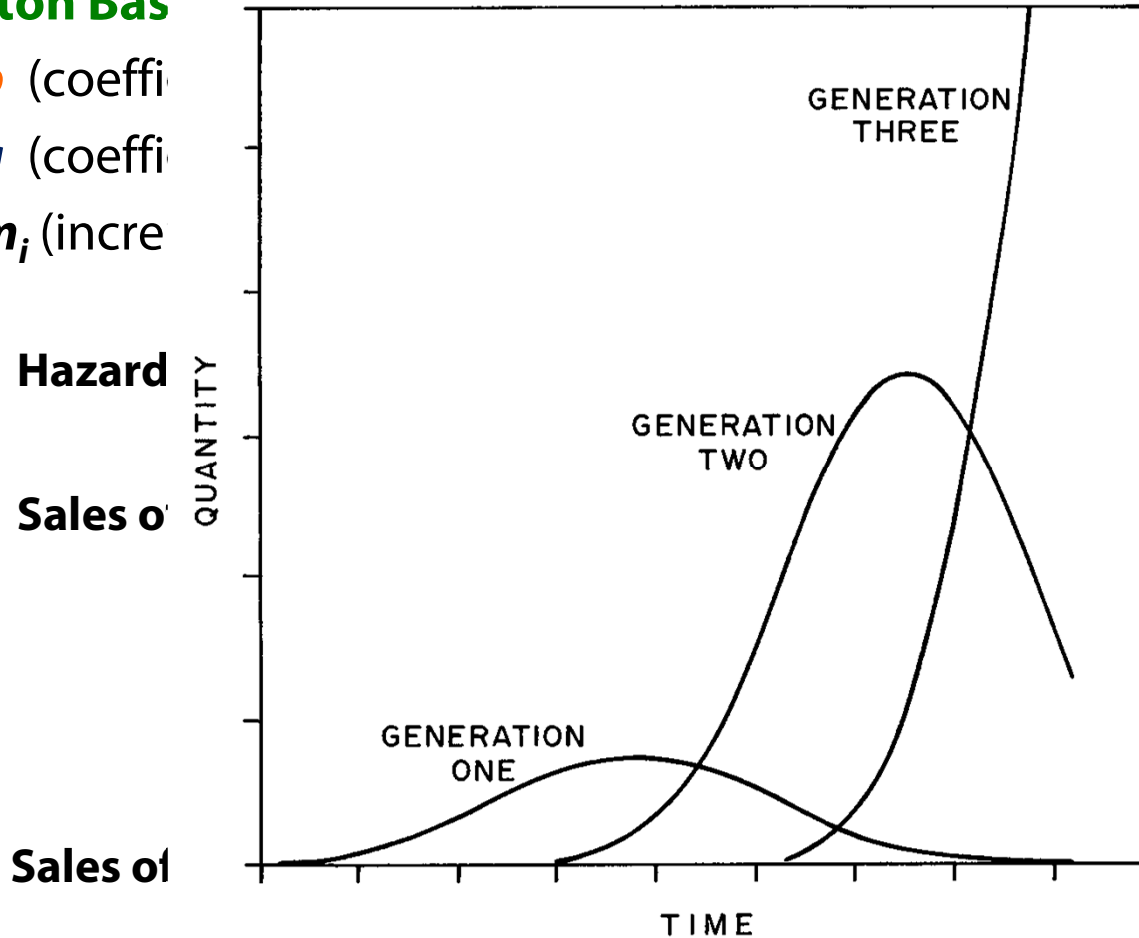- Both diffusion & substitution of new products (e.g. IC feature sizes, OS version)

- **[Norton Bass** _____ el:

  - **p** (coeffi_____ _____ nal marketing)
  - **q** (coeffi_____ _____ l of mouth")
  - **m_i** (incre_____ _____ ration)

  Hazard

  Sales o

  Sales of _____ $)][1 - F(t - \tau_3)]$

FIGURE 1. A Series of Technological Generations.

Cumulative	Market	Fraction lost
fraction of	potential of	to 3rd gen.
adopters	2nd gen	

etc.

Network Externalities/Effects (economics)

"The utility that a given user derives from the good depends upon the **number** of other users who are in the same "network" as he or she." **[Katz & Shapiro 1985]**

- **Direct network effects:**
  - Increased direct usage leads to direct increases in value
  - Classic examples: phone, fax, videoconferencing

Impact on compatibility & standards ?

- **Indirect network effects:**
  - Increased direct uses increases the value of complementary goods
- **Two-sided network effects:**
  - "two sets of agents interact through an intermediary or platform, and the decisions of each set of agents affects the outcomes of the other set of agents, typically through an externality." **[Rhysman 2009]**
  - Videogames, search engines, credit cards, dating services, etc.
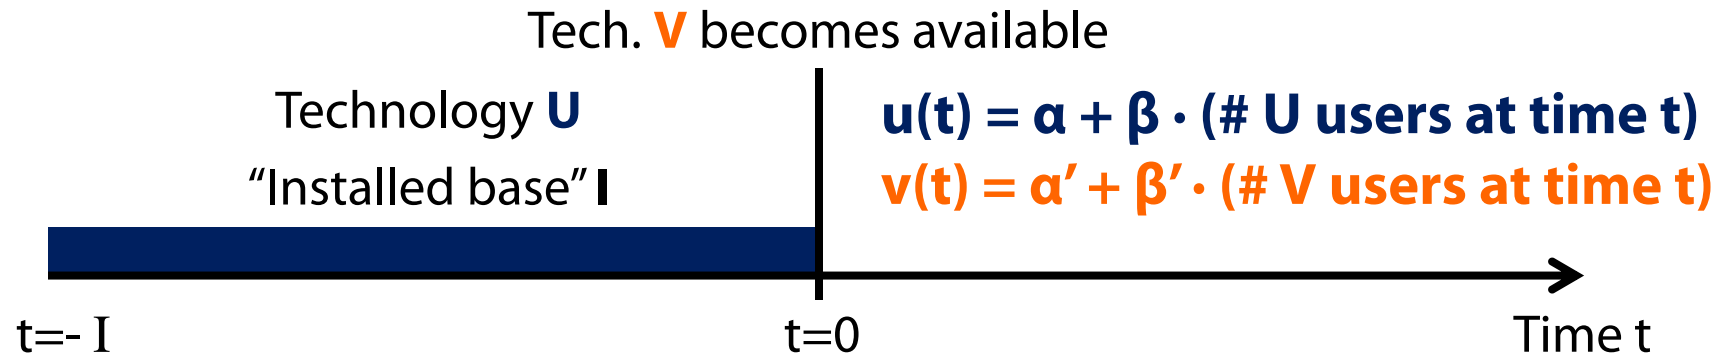- **Local network effects:**
  - Users influenced by decision of their neighbors (e.g. **[Kempe et al '2003]**)

Rogers calls some of these "interactive innovations" : an individual's decisions are influenced by the decisions of **future adopters**
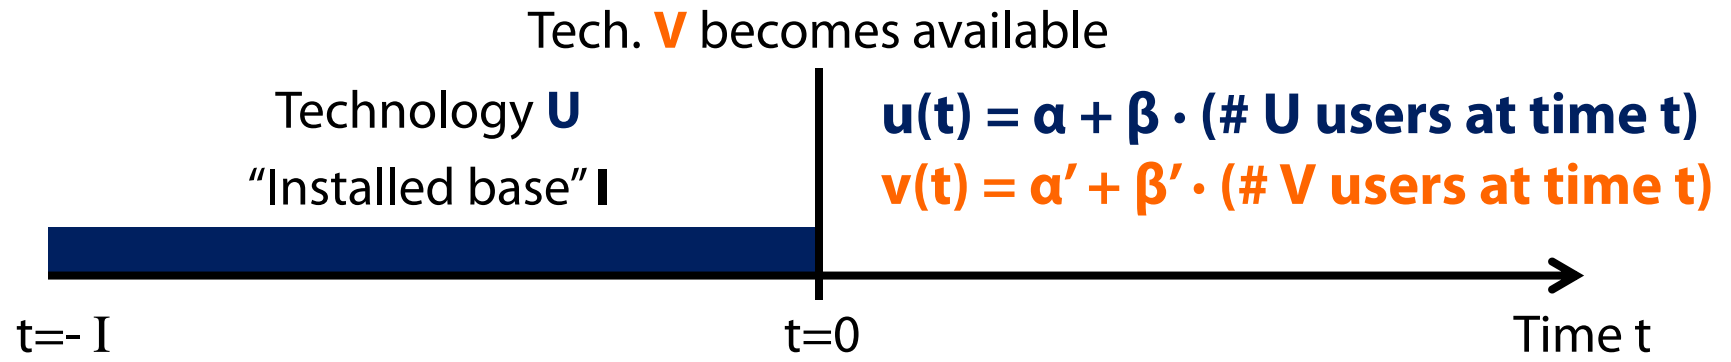
Installed base & compatibility [Farrell&Saloner 1986] (1)

- Simple model to show how network effects can lead to inefficient outcomes

- **Model:** Two incompatible technologies **U** and **V** with network externalities
- … & homogenous infinitesimal users arriving continuously (at unit rate)

Tech. **V** becomes available

Technology **U**

"Installed base" **I**

t=- I   t=0   Time t

$$u(t) = \alpha + \beta \cdot (\# \text{ U users at time t})$$
$$v(t) = \alpha' + \beta' \cdot (\# \text{ V users at time t})$$

Incompatible technologies:
I only get utility from users of the tech I choose

What happens at t=0?

(1) users are homogenous &
(2) tech is more attractive w. more users

➔ decision made by user at time 0 is copied by all future users.

➔ **2 equilibria:**

Adoption (of V)

Nonadoption (of V)

Installed base & compatibility [Farrell&Saloner 1986] (2)

Tech. **V** becomes available

Technology **U**

"Installed base" **I**

u(t) = α + β · (# U users at time t)

v(t) = α′ + β′ · (# V users at time t)

t=- I   t=0   Time t

- Utility of choosing **U** at **t=0** given equilibrium is **adoption**

$$u^-(0) = \int_0^\infty (\alpha + \beta I)\, e^{-rt} dt = (\alpha + \beta I)/r$$

- Utility of choosing **U** at **t=0** given equilibrium is **nonadoption**:

$$u^+(0) = \int_0^\infty (\alpha + \beta I + \beta t)\, e^{-rt} dt = (\alpha + \beta I)/r + \beta/r^2$$

- Utility of choosing **V** at **t=0** given equilibrium is **nonadoption**:

$$v^-(0) = \int_0^\infty \alpha'\, e^{-rt} dt = \alpha'/r$$

- Utility of choosing **V** at **t=0** given equilibrium is **adoption**:

$$v^+(0) = \int_0^\infty (\alpha' + \beta' t)\, e^{-rt} dt = \alpha'/r + \beta/r^2$$

Installed base & compatibility [Farrell&Saloner 1986] (3)

Tech. **V** becomes available

Technology **U**

"Installed base" **I**

$u(t) = \alpha + \beta \cdot (\text{\# U users at time t})$

$v(t) = \alpha' + \beta' \cdot (\text{\# V users at time t})$

t=- I   t=0   Time t

Utility of choosing **U** given equilibrium is **adoption:** $u^{-}(0)$

Utility of choosing **U** given equilibrium is **nonadoption**: $u^{+}(0)$

Utility of choosing **V** given equilibrium is **nonadoption:** $v^{-}(0)$

Utility of choosing **V** given equilibrium is **adoption:** $v^{+}(0)$

What should user arriving at time 0 do?

Choose **adoption** if $u^{+}(0) < v^{-}(0)$

Choose **nonadoption** if $v^{+}(0) < u^{-}(0)$

Else, both **nonadoption** and **adoption** are equilibria

Installed base & compatibility [Farrell&Saloner 1986] (4)
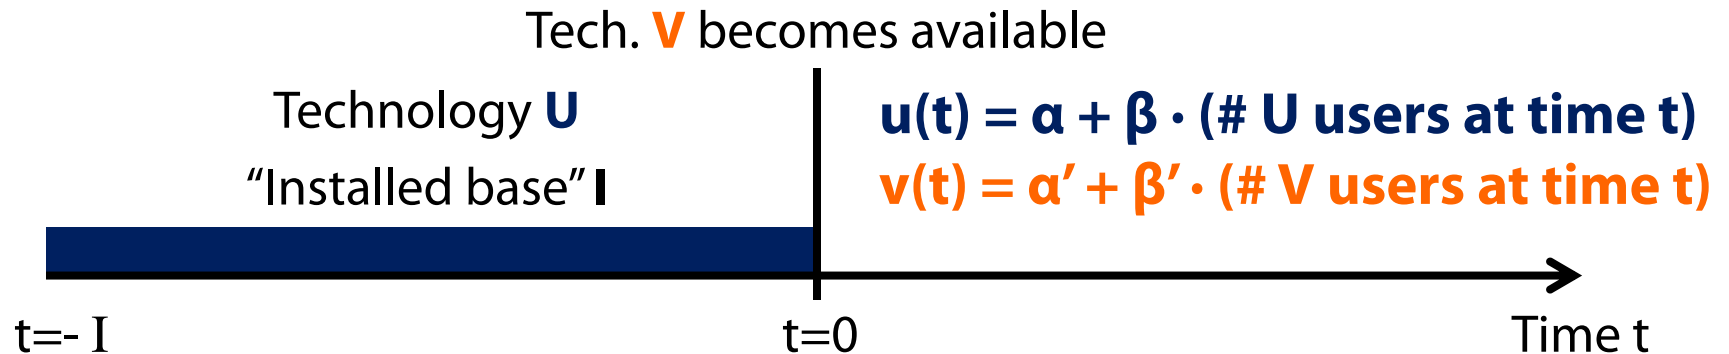
Tech. **V** becomes available

Technology **U**

"Installed base" **I**

$u(t) = \alpha + \beta \cdot (\text{\# U users at time t})$
$v(t) = \alpha' + \beta' \cdot (\text{\# V users at time t})$

t=- I   t=0   Time t

Utility of choosing **U** given equilibrium is **adoption:** $u^-(0)$
Utility of choosing **U** given equilibrium is **nonadoption**: $u^+(0)$
Utility of choosing **V** given equilibrium is **nonadoption:** $v^-(0)$
Utility of choosing **V** given equilibrium is **adoption:** $v^+(0)$

Improved welfare of **adoption** equilibrium vs **nonadoption** equilibrium **at time 0**:

$$\int_0^\infty (v^+(t) - u^+(t))e^{-rt}dt - (u^+(0) - u^-(0)) \cdot I = \frac{(\alpha' - \alpha)}{r^2} + \frac{(\beta' - \beta)}{r^3} - \frac{2\beta I}{r^2}$$

Change in utility for users arriving after time 0

Loss in utility for installed base.

+ve or –ve!

"**Relative advantage**" [Rogers'62]

Installed base & compatibility [Farrell&Saloner 1986] (5)

**Change in welfare
if adoption is chosen**

Intrinsic advantage of **v** over **U** ($\Delta = \alpha' - \alpha$)
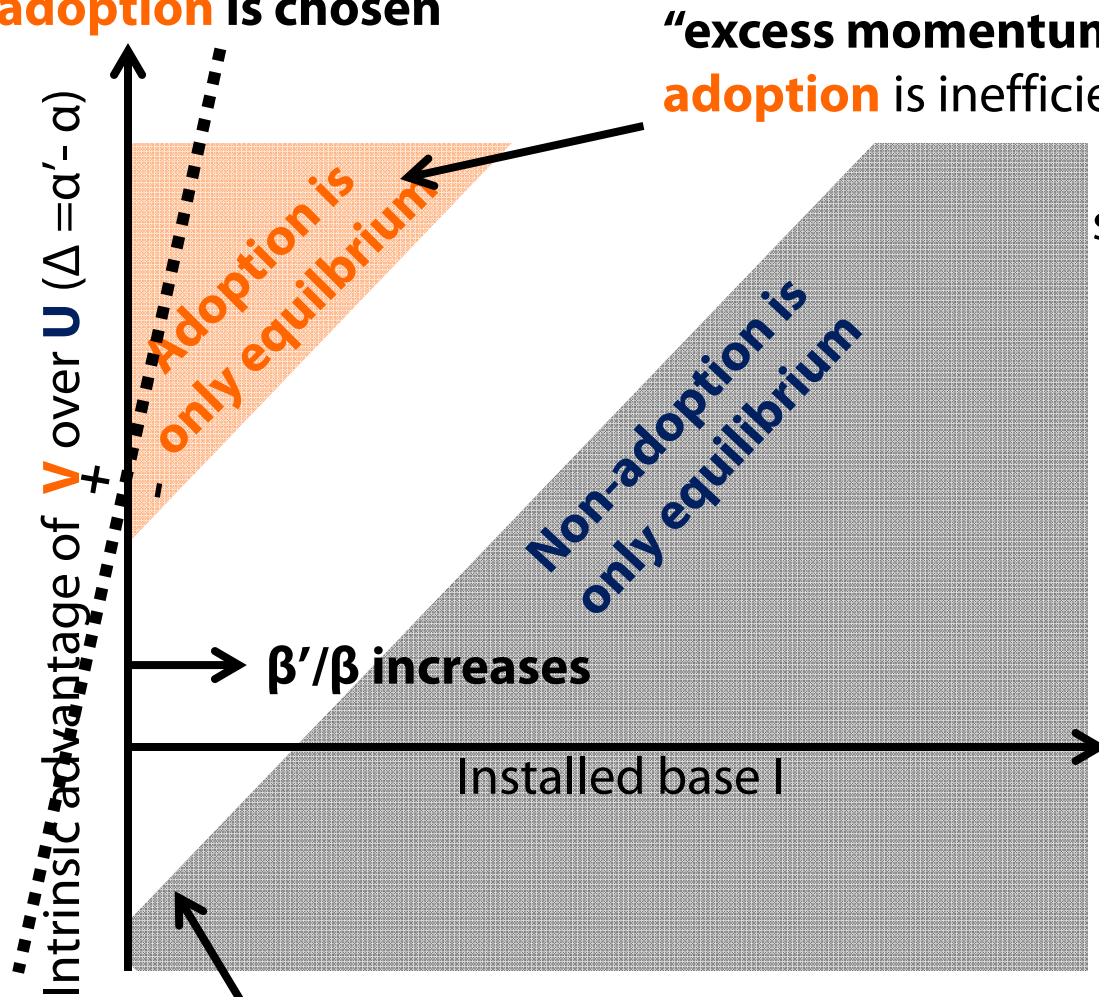
"excess momentum"
adoption is inefficient but is an equilibrium
Why? Installed base is stranded and loses utility.

Adoption is only equilibrium

Non-adoption is only equilibrium

β'/β increases

Installed base I

"excess inertia"
adoption is efficient but **nonadoption** is an equilibrium
Why? Externality kicks in late, no incentive to adopt at **t=0**

Do converters facilitate the transition? [Choi 1994] (1)

Tech. **V** becomes available

Technology **U**

"Installed base" **I**

t=- I　　　　　　　　　　t=0　　　　　　　　Time t
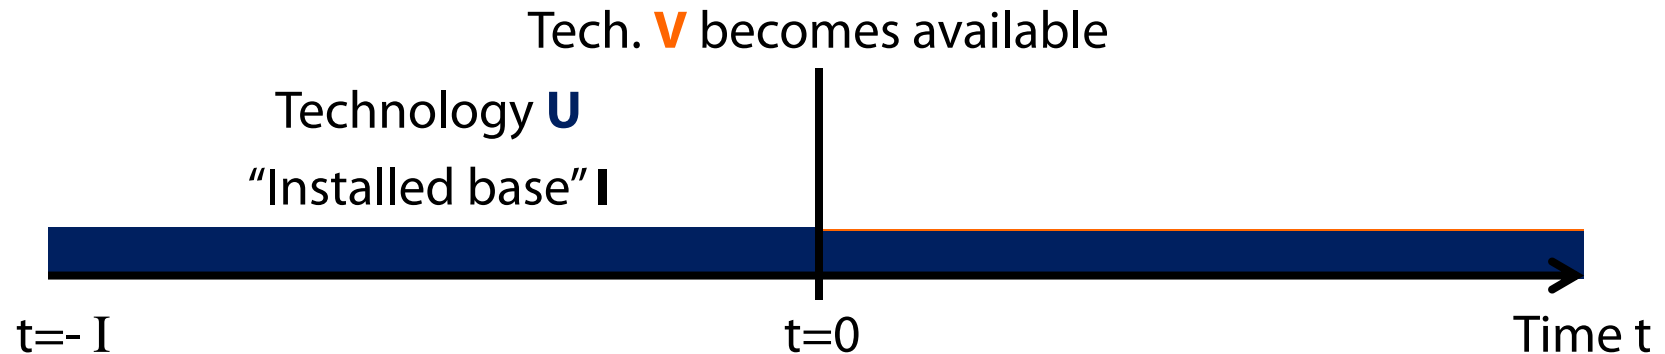
$u(t) = α + β · (\text{\# U users at time t}) + q · β' · (\text{\# V users at time t})$

$v(t) = α' + β' · (\text{\# V users at time t}) + q · β · (\text{\# U users at time t})$

q < 1 is the cost of conversion

Recalculate $u^-(0), u^+(0), v^-(0)$ and $v^+(0)$ using equations above….

As before:

Adoption is only equilibrium if $u^+(0) < v^-(0)$

Nonadoption is only equilibrium if $v^+(0) < u^-(0)$

Else, both **nonadoption** and **adoption** are equilibria

Do converters facilitate the transition? [Choi 1994] (2)

Letting β= β':

"excess momentum"

Change in welfare if adoption is chosen (w. converter)

+
–

Relative advantage of **V** over **U** ($\Delta = \alpha' - \alpha$)

No converter: Adoption

Converter: Adoption

No converter: Nonadoption

Converter: Nonadoption

Installed base I

Converters enable **adoption**!
Why? Converters allow early adopters get utility from the installed base.
Sadly, adoption is inefficient (big installed base loses utility).

Converters enable **adoption** & **adoption** is efficient!

Converters block **adoption**! (Early adopters prefer immediate benefits of joining installed base, instead of long-term gain they prefered w/o converters.) Fortunately, adoption is inefficient.

Internet Economics 101

Stub AS (traffic source/sink!) – **85% of ASes!** (Fictional topology, for illustrative purposes only!)

Internet Service Provider (ISP)
(makes money by carrying traffic)

Content provider:
(BIG traffic source/sink)

Legend:

Autonomous system

Customer-to-provider

Settlement-free peer

"Eyeballs" / home users

Banca d'Italia

Telecom Italia

Level 3

AT&T

Google

Bell Canada

TD Bank

End users
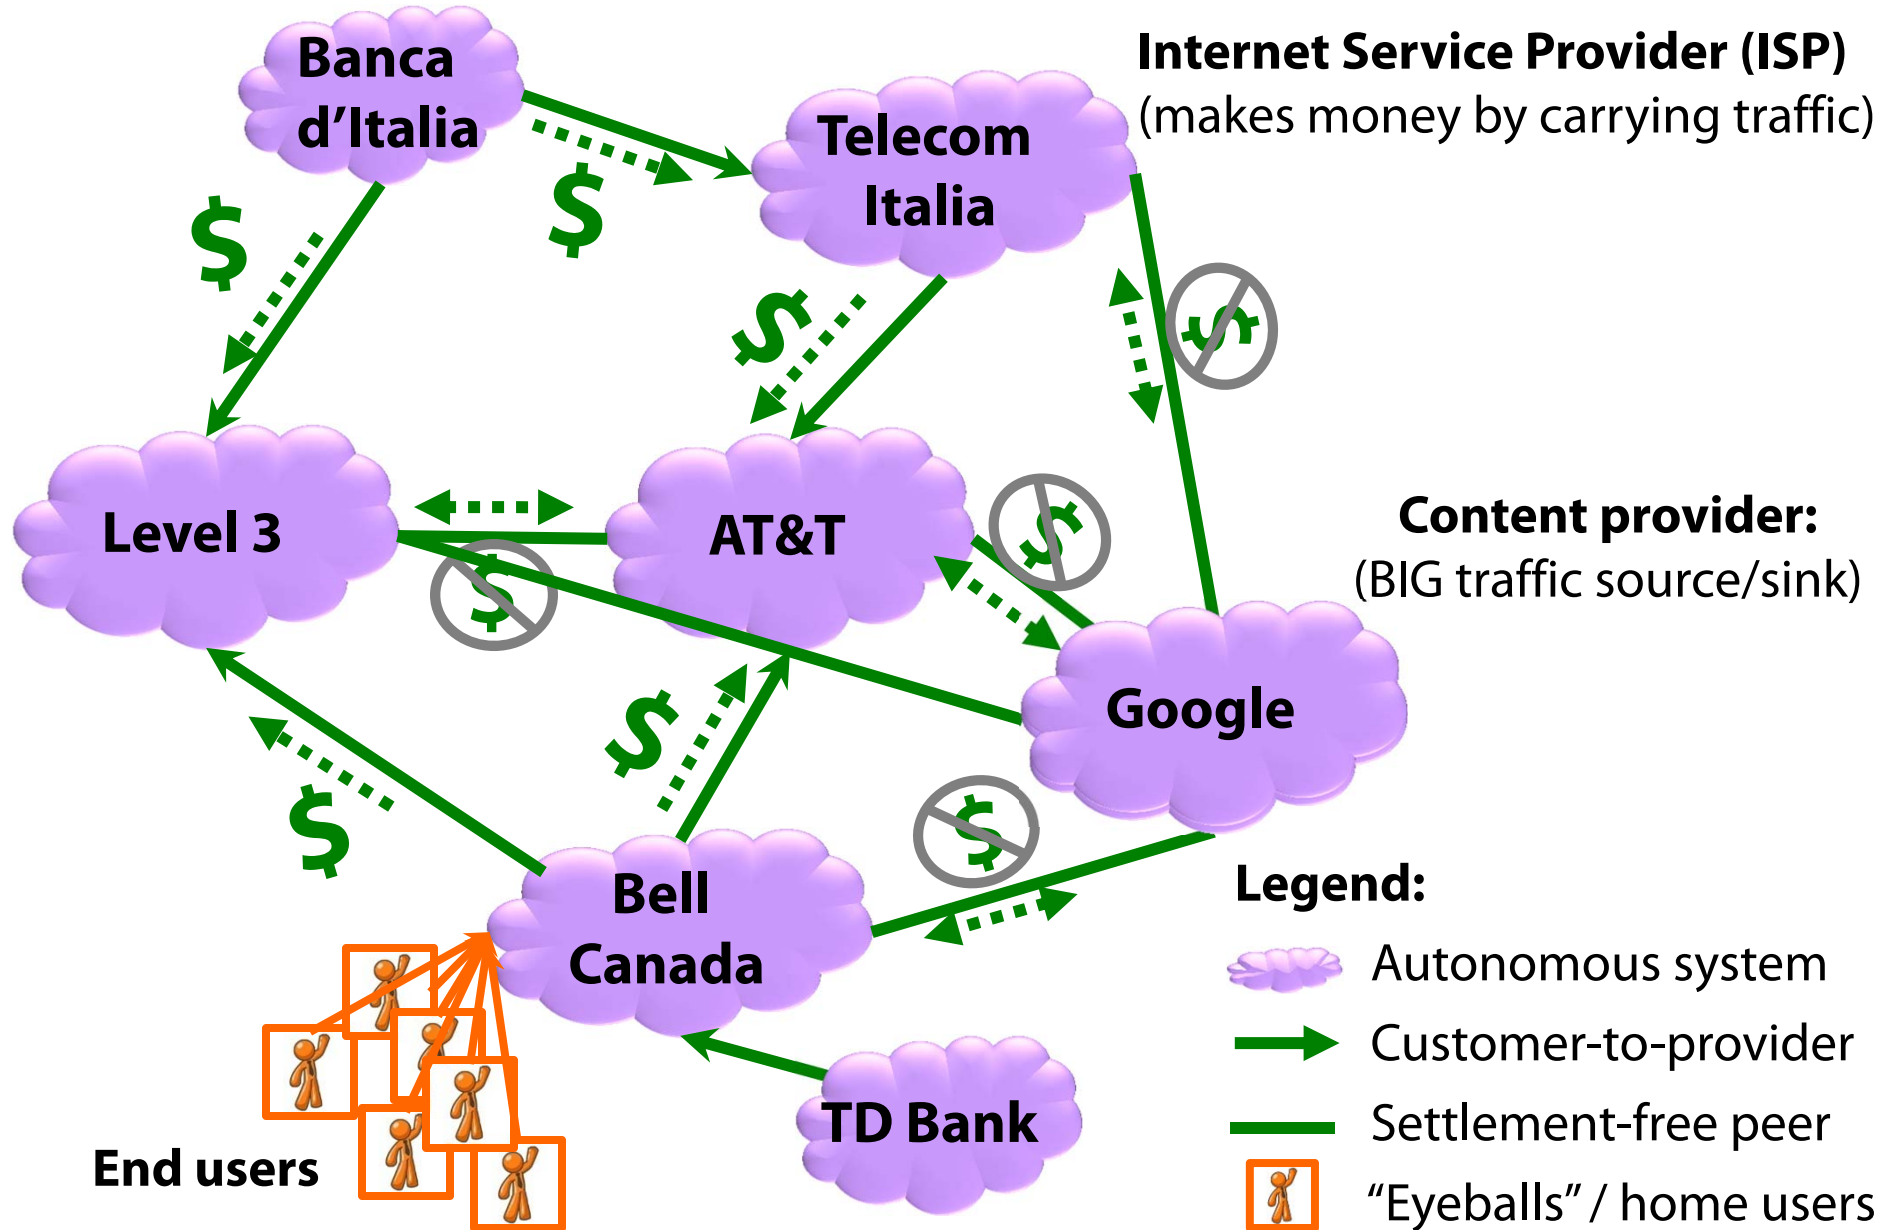
The (looming?) upgrade to IPv6
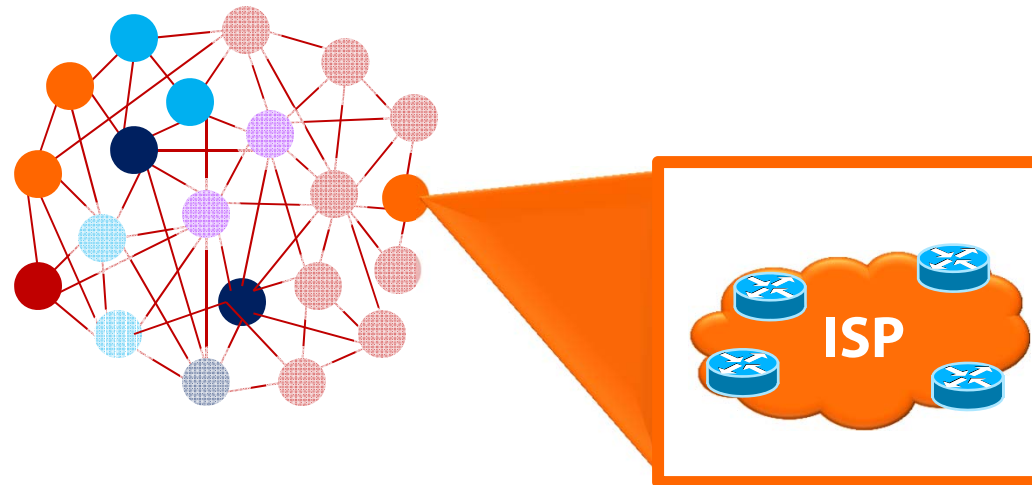
A technology that is:
1) not compatible with the installed base, and
2) imposes a network externality.

Internet Protocol 101: IPv4

65.215.1.12

Bell
Canada

74.125.127.99

Google

Tx: 65.215.1.12

Rx: 74.125.127.99

IPv4

- **The length of the IP address is 32 bits.**
    - This is hard coded into all browsers, laptops, routers, switches, everything!
- **To put this in perspective: 2^{32} = 4 Billion. # of people in world = 7 Billion**
    - So how do we survive?
- **NATs (Network address translation):**
    - A box that translates a *private* IP address into a *public* one.

Internet Protocol 101: IPv4 & NAT
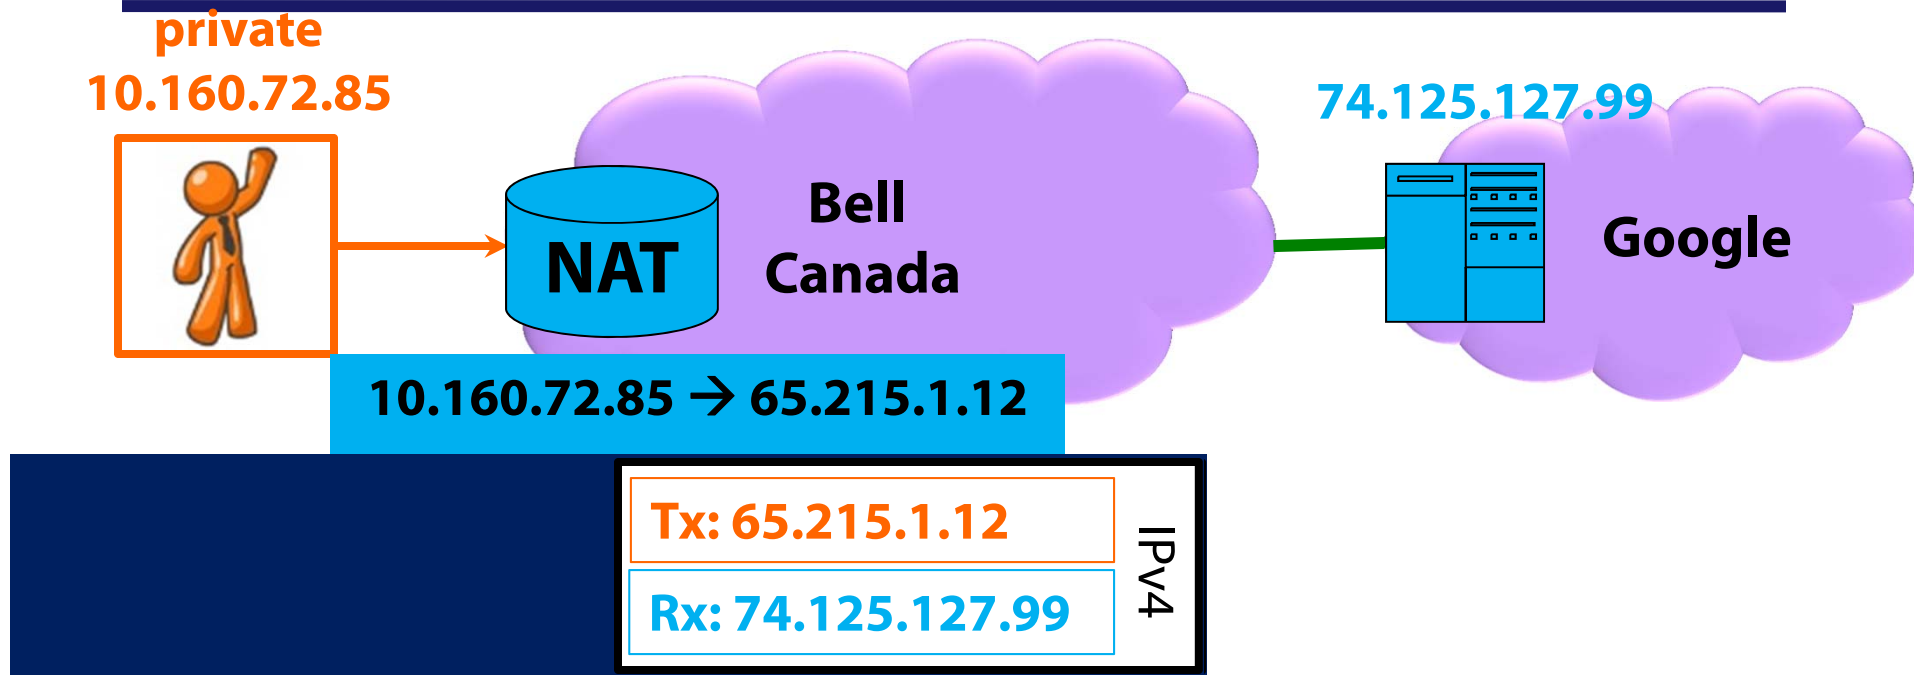
private
10.160.72.85

Bell Canada

74.125.127.99

NAT

Google

10.160.72.85 → 65.215.1.12

Tx: 65.215.1.12

Rx: 74.125.127.99

IPv4

- **The length of the IP address is 32 bits.**
  - This is hard coded into all browsers, laptops, routers, switches, everything!
- **To put this in perspective: 2^{32} = 4 Billion. # of people in world = 7 Billion**
  - So how do we survive?
- **NATs (Network address translation):**
  - A box that translates a *private* IP address into a *public* one.

We have run out of "unallocated" IPv4 addresses

IPv4 Address Pool Status

Private address & other stuff

None left!

IANA

Afrinic

APNIC

ARIN

RIPE

LACNIC

IETF_Reserved_Pool

VARIOUS_Pool

AFRINIC_Pool

APNIC_Pool

ARIN_Pool

RIPENCC_Pool

LACNIC_Pool

Pool Size (/8s)

0 10 20 30 40 50 60 70 80 90

Pool Unadvertised Advertised

Internet Protocol 101: IPv4 & IPv6

0:eda7:9a75:49f4:3010

Bell Canada

2001:4860:a002::68

Google
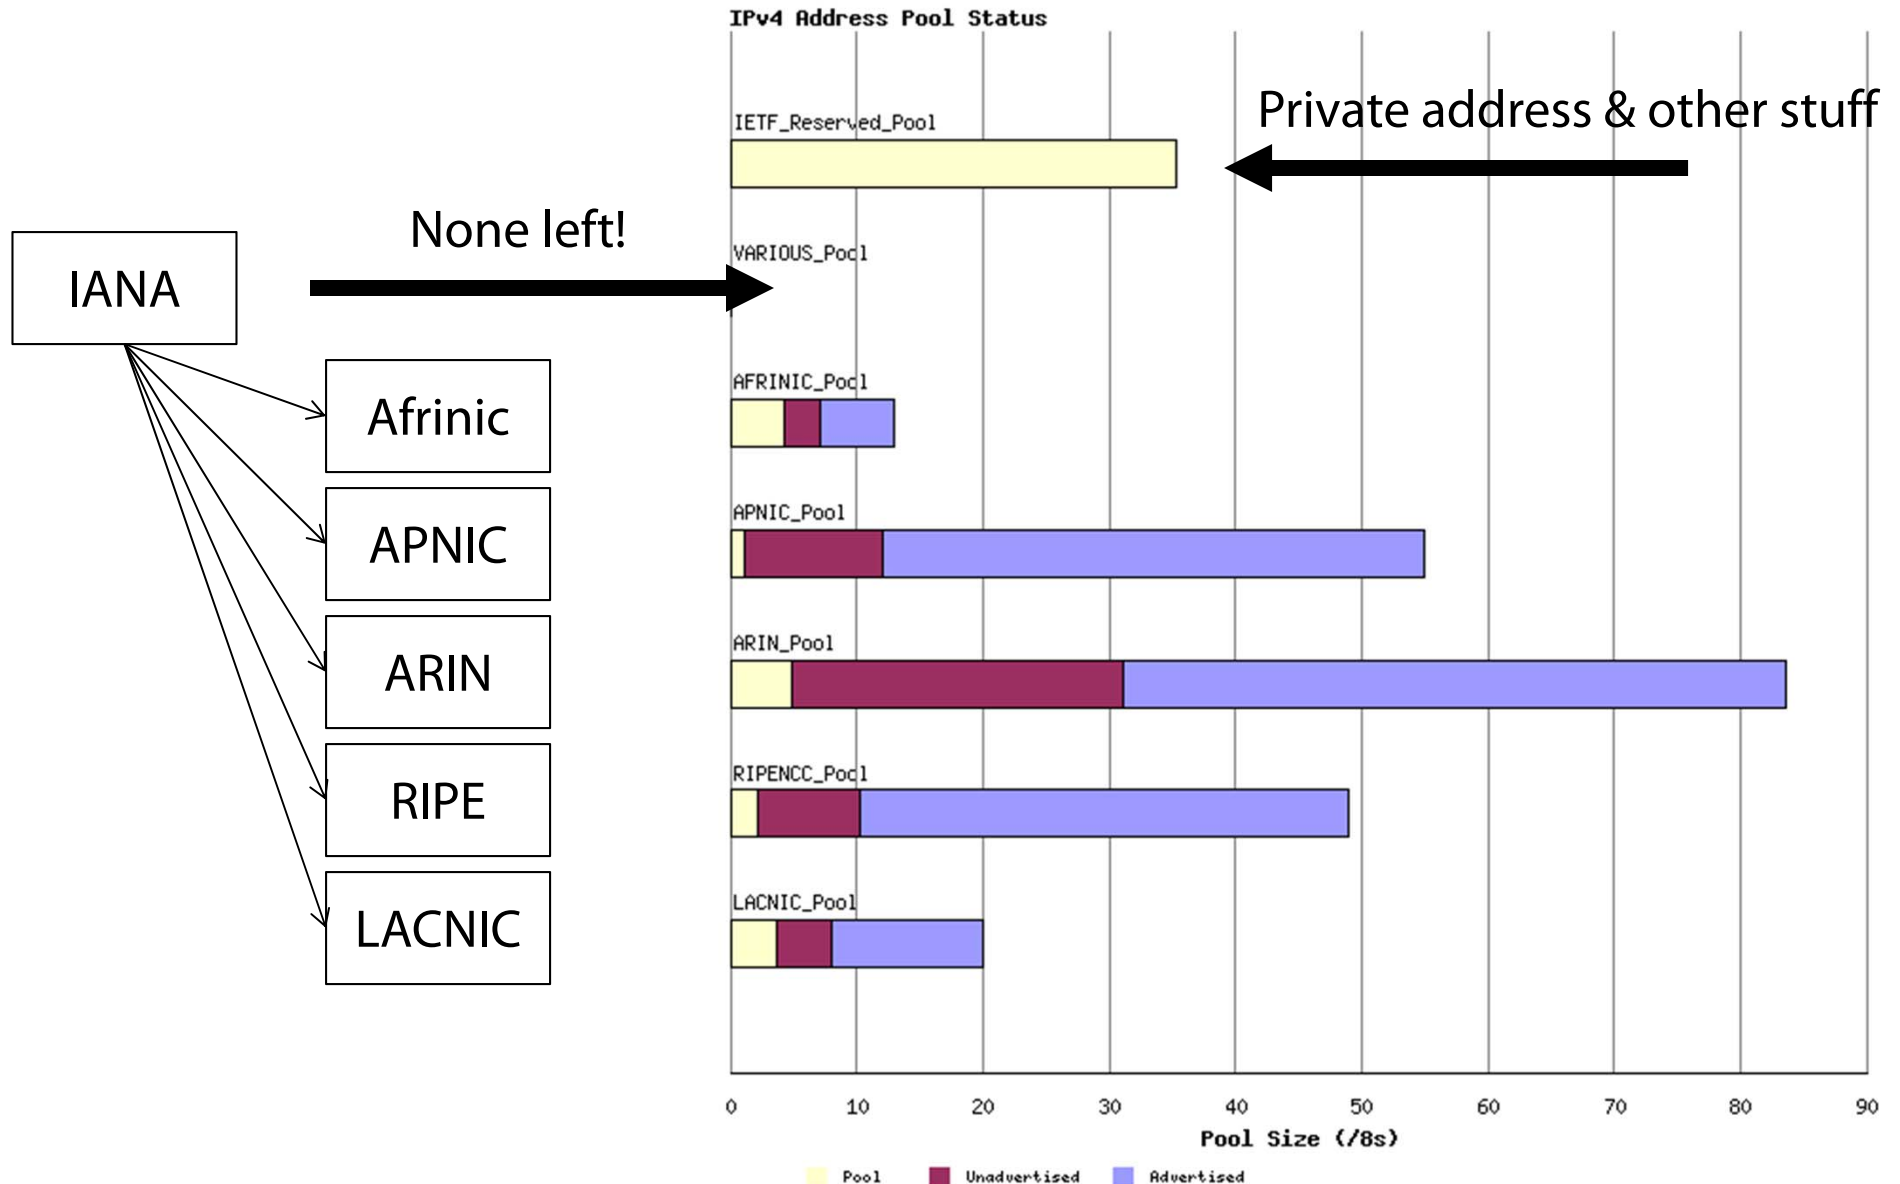
IPv4

Tx: 10.160.72.85

Rx: 74.125.127.99

IPv6

Tx: 2001:4898:4030:3010:eda7:9a75:49f4:3010

Rx: 2001:4860:a002::68

- **IPv6 was standardized in 1998. It increases address length to 128 bits.**
  - Now we have $2^{128} = 3 \times 10^{38}$ addresses. And that's about all it does...
  - …. except maybe get rid of NATs once **everyone** uses it.
- **IPv6 is not compatible with IPv4, because the headers are different!**

Why is this transition so difficult? (1)

Problem 1: Everyone on Internet must be able to talk to everyone else.

- How to achieve this with incompatible technologies?

- **Solution 1**: Use conversion. The catch: Performance degrades.

IPv6

0:eda7:9a75:49f4:3010

IPv4

74.125.127.99

Converter

Bell Canada

Google
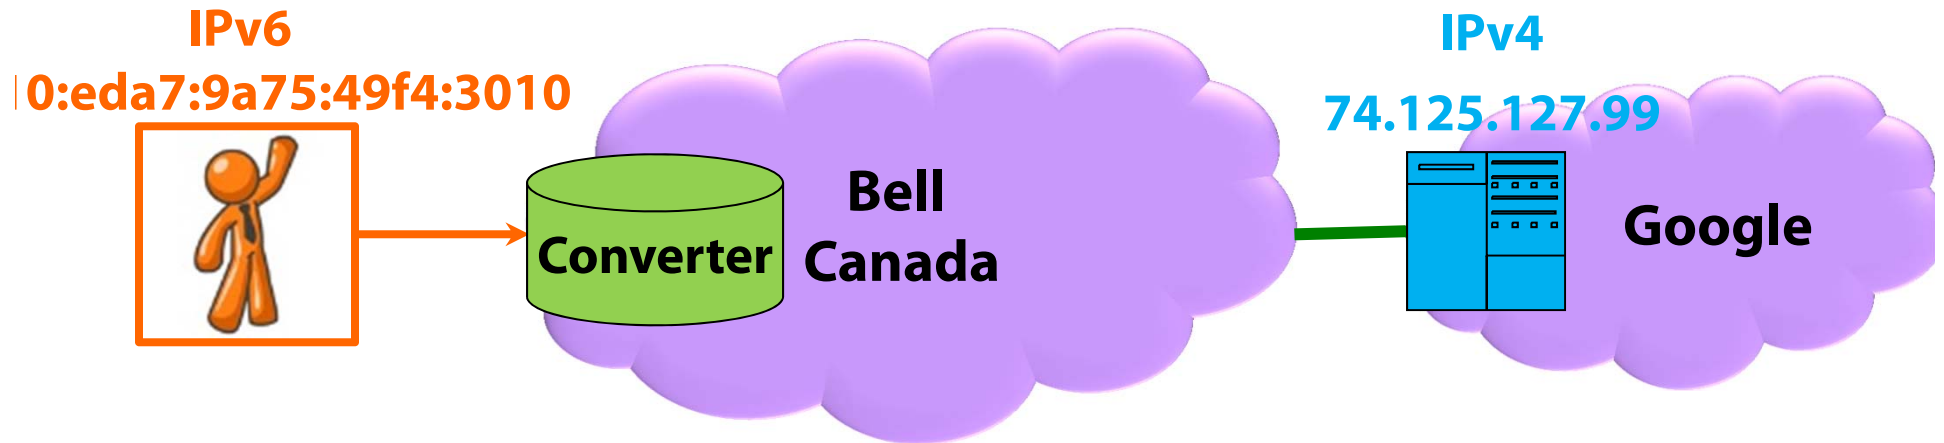
- **Solution 2**: "Dual stack" devices run both IPv6 and IPv4.
    - The catch: This doesn't save addresses.
    - The catch: IPv4-only device perform better & can still talk to everyone!

Why is this transition so difficult? (2)

Problem 1: Everyone on Internet must be able to talk to everyone else.

- How to achieve this with incompatible technologies?
- **Solution 1**: Use conversion. The catch: Performance degrades.
- **Solution 2**: "Dual stack" devices run both IPv6 and IPv4.
  - The catch: This doesn't save addresses.
  - The catch: IPv4-only device perform better & can still talk to everyone!

Problem 2: There may not be a IPv6 path through the network

- Solution: Use a tunnel.
  - The catch: Performance degrades.

Are conversion technologies speeding/slowing the transition?

The IPv6 Transition Plan

Size of the Internet

IPv6 Deployment

IPv6 Transition – Dual Stack

IPv4 Pool Size

Time
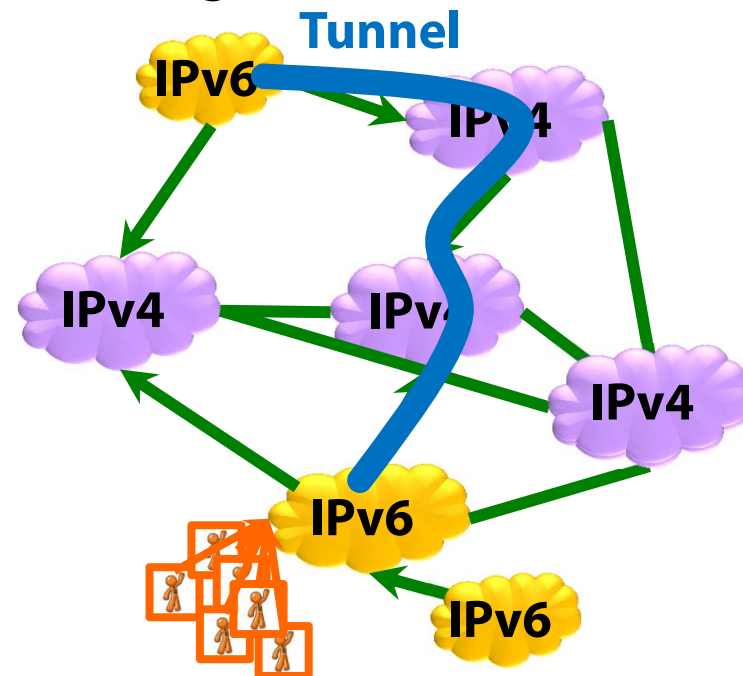
Slide: Geoff Huston
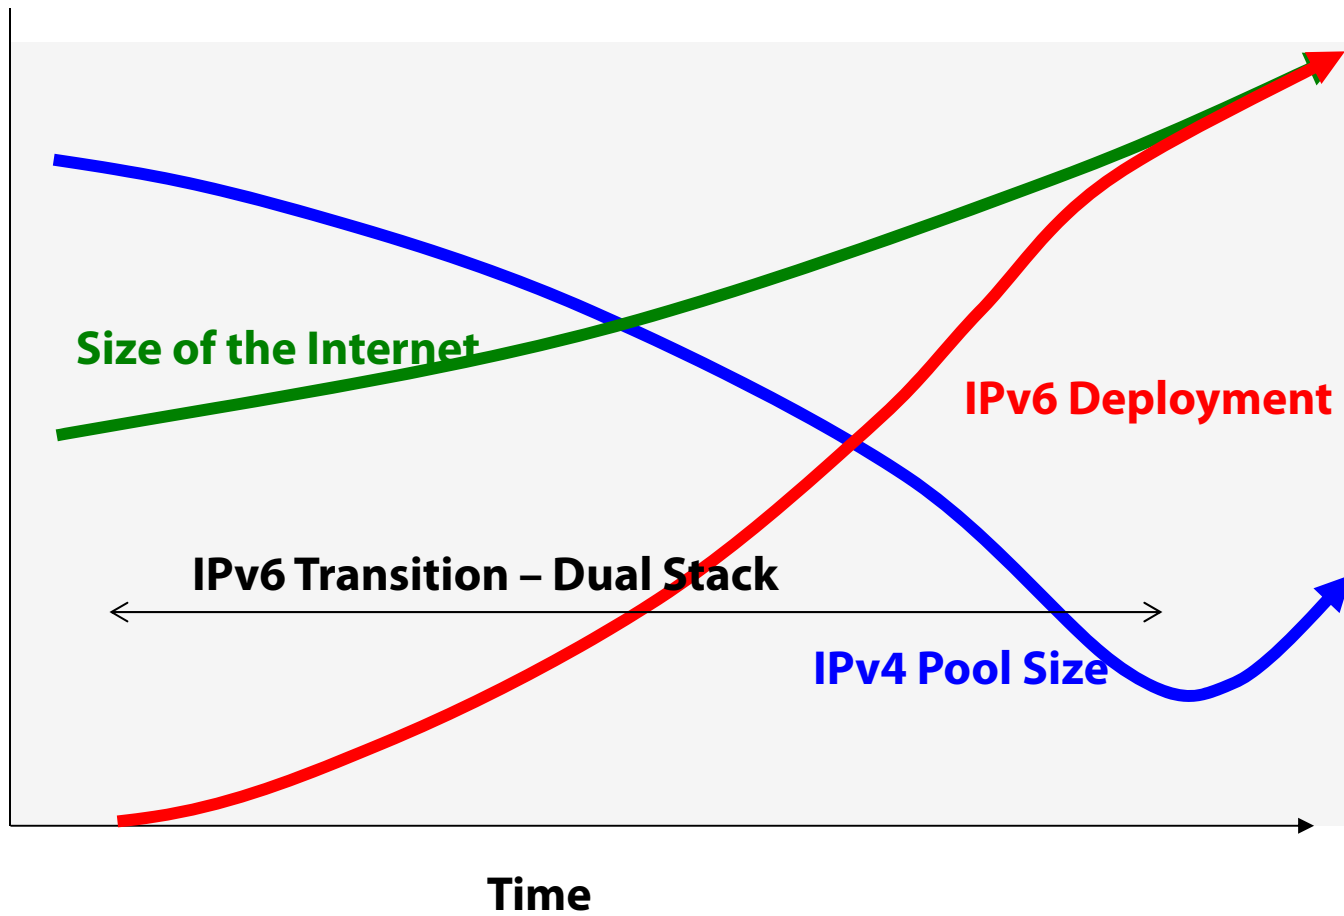
IPv6 Adoption as seen by Google (June 3, 2012)

http://www.google.com/intl/en/ipv6/statistics/

The IPv6 Transition Plan v 2.0
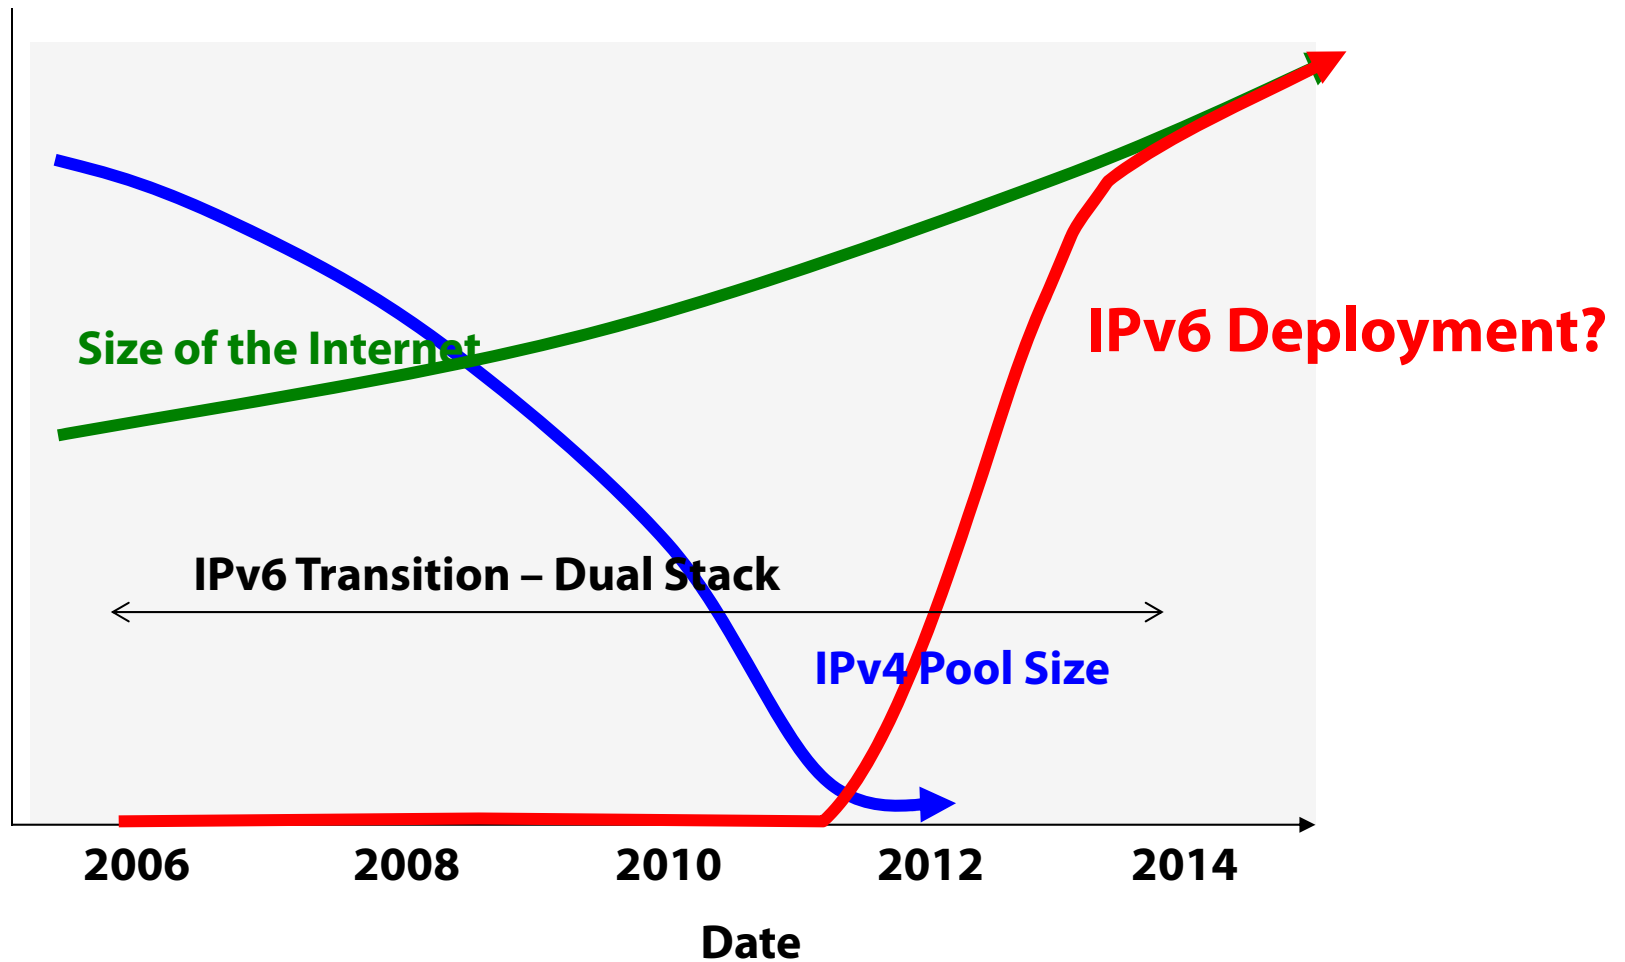
Or maybe we'll just keep using IPv4 indefinitely?

Slide: Geoff Huston

Can this transition be managed via market mechanisms?

"The minister for communications and information technology does not believe that regulatory intervention is appropriate. Adoption of IPv6 needs to be lead by the private sector. The private sector must recognise that adopting IPv6 is in their own best interests to protect their investment in online capabilities into the future. Issues of advantages and disadvantages, costs, risks, timing, methodology etc, have to be for each enterprise to assess for itself."

New Zealand Minister for Communications, Aug 24, 2009

- **IPv4 vs IPv6. What's the difference?**
  - Cost? Not right now.
  - Functionality? No.
  - Performance? No. Actually IPv6 usually performs worse.
  - Consumer visibility difference? No.
  - Consumer demand? No.
  - Competitive differentiators? Only future risk.

[Slide: Geoff Huston]

Overview of results on the transition from IPv4 to IPv6

How do converters, quality & price affect the transition:

- [Choi'94] & [Sen, Jin, Guerin, Hosanger'10]

Transit ASes should act as 2-sided market [Guerin, Hosanger'...]

- Give customers & content providers incentives to use IPv6.

Markets aren't going to work here – IPv6 is public good.

- **Geoff Huston** subsidies and regulation could help.
- Or maybe just peer pressure & publicity?

WORLD IPv6 LAUNCH

13D 02:30:13
THIS TIME IT IS FOR REAL
6 JUNE 2012

AKAMAI
COMCAST
FREE TELECOM
KDDI
TIME WARNER CABLE

AT&T
D-LINK
GOOGLE
LIMELIGHT
XS4ALL

CISCO
FACEBOOK
INTERNODE
MICROSOFT BING
YAHOO!

DO YOUR PART
JOIN THE LAUNCH!

Federal Government Imposes New IPv6 Deadlines

'Native' IPv6 by FY 2012 for public-facing servers and services

Sep 30, 2010 | 04:03 PM |

By Kelly Jackson Higgins

The Obama administration's CIO has informed federal agencies that they must run native IPv6 on their Web, email, ISP, and DNS servers and services by the end of fiscal year 2012, and their internal client applications by fiscal year 2014.

In a Sept. 28 memo (PDF) sent to federal CIOs, Vivek Kundra, the nation's federal CIO, outlined the

Forget it, it won't happen. Treat IPv4 address as scarce commodity & move on!

- [Edleman Swartz '11] Let's just auction off IPv4 address space.

Were do we fall in the [Choi 1994] model?

It's hard to say...

Relative advantage of V over U ($\Delta = \alpha' - \alpha$)

No converter: Adoption

Converter: Adoption

No converter: Nonadoption

Converter: Nonadoption

Installed base I

We're probably here somewhere.
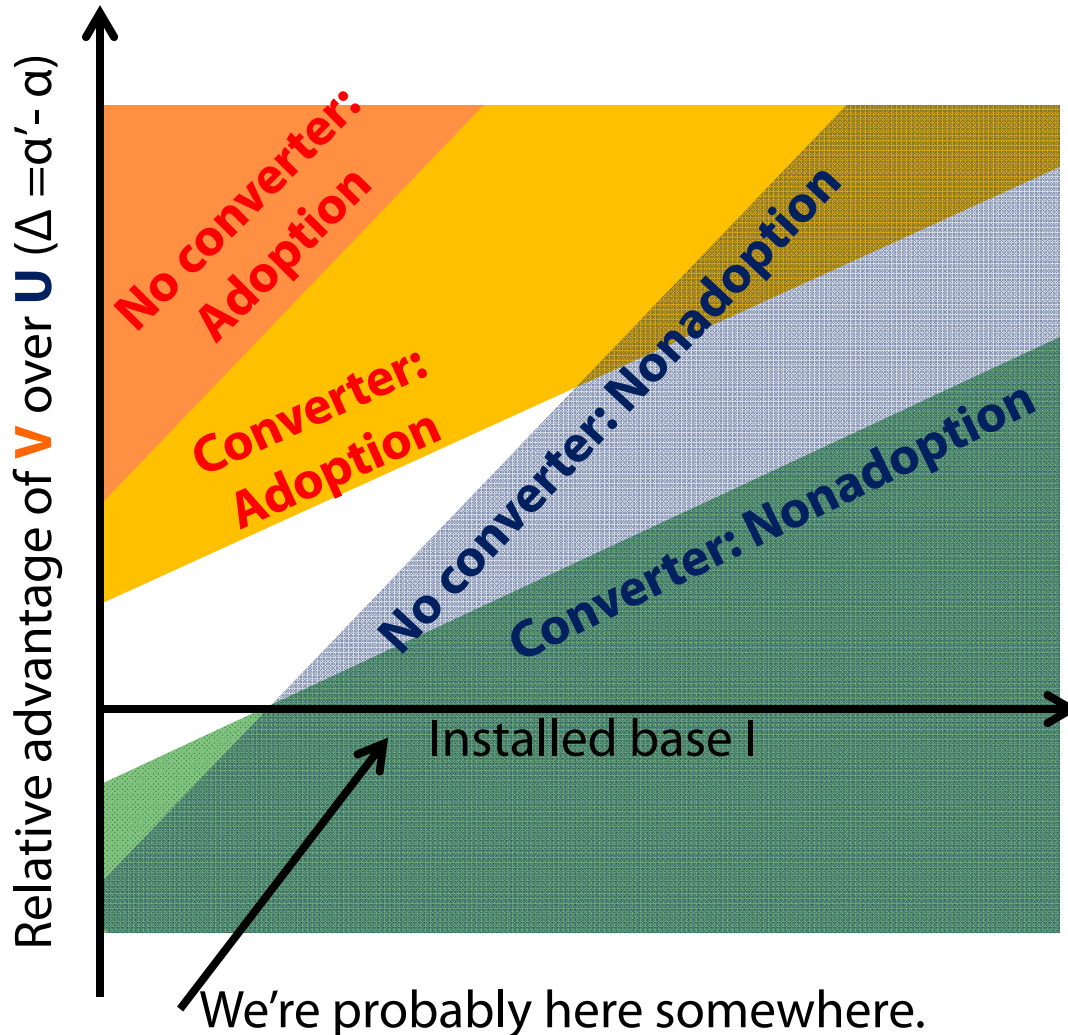
One way to fit IPv6 in this model is to have a very nonlinear network externality function, so that the positive benefit only kicks in when **most** people adopt.

Also, installed base should also be able to switch to IPv6.

Another model of the transition [Sen, Jin, Guerin, Hosanger'10]

Technology 1: $U_1(\theta, x_1, x_2) = \theta\, q_1 + (x_1 + \alpha_1 \beta\, x_2) - p_1$

Technology 2: $U_2(\theta, x_1, x_2) = \theta\, q_2 + (x_2 + \alpha_2 \beta\, x_1) - p_2$

Cost (recurrent) of each tech (p_i) and intrinsic technology quality (q_i)

Linear Network Externalities ($0 < x_l + x_2 < 1$)

- $\alpha_i,\ 0 \leq \alpha_i \leq 1,\ i = 1,2$, captures converters performance

User sensitivity to technology quality (θ)

- Private information for each user, but known distribution

If $H_i(x_1(t), x_2(t))$ is fraction of users that prefer tech i at time t

$$x'_1(t) = \gamma \left[H_1(x_1(t), x_2(t)) - x_1(t) \right]$$

γ is hazard rate, ie. $\mathbf{Pr}$[User adopts at time t | It didn't adopt at time $< t$]

At equilibrium $H_1(x^*_1(t), x_2(t)) = x^*_1(t)$

Sample Results [Sen, Jin, Guerin, Hosanger'10]

Question: Given a starting point $(x_1(0),0)$, what is (x_1^*, x_2^*) at equilibrium?

IPv4 Slightly "Better" than IPv6

- In the absence of gateways, IPv6 never takes off unless IPv4 initial penetration is very low...

- After introducing "perfect" gateways (α=100%), IPv6 eventually takes over, irrespective of IPv4 initial penetration
  - There is a "threshold" value (**80%**) for gateway efficiency below which this does not happen!
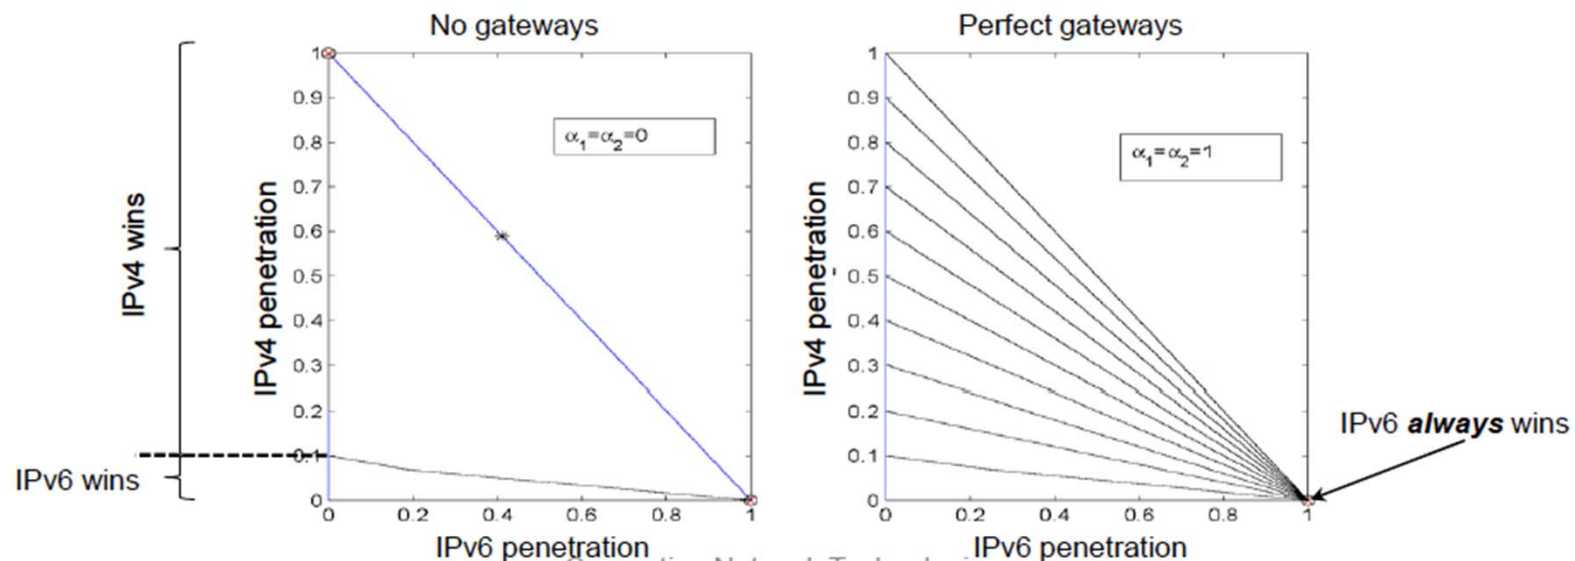
What if ISPs act as 2-sided market? [Guerin, Hosanger'11]

Bell Canada

(The platform)

Google

Number of users is

$$x_4 + x_6(t)$$

exogenous, fixed

Chooses qualities: q_4, q_6, q_{46}

Choose α: fraction of IPv4 users that also get a IPv6 address .

Subject to b: budget for fraction of converted traffic.

Chooses whether to make server available via IPv6 based on the quality IPv6 traffic receives.

Findings:

1. If $q_6 < q_{46}$ then Google has no incentive to become available via IPv6.
2. If q_{46} is "high quality" then keeping converted traffic $< b$ requires $q_4 < q_6$.
3. If $q_6 > q_4$ then choose bigger α, Google adopts IPv6 & converted traffic $<b$.

Issue: Not clear ISP has incentive to be a platform!

Is the transition to IPv6 a market failure?

Huston and others suggest that the transition is a market failure.

- "situation in which … market equilibria cannot be relied on to give Pareto optimal outcomes" **[Mas-Collel, Whinston, Green 1995]**

- Usually requires subsidies or government intervention.

Market failures are often caused by public goods:

- "Consumption of a unit of the good by one agent does not preclude its consumption by another" **[Mas-Collel, Whinston, Green 1995]**

- **Huston** suggests IPv6 is a public good.

- **Non-excludable?** Not possible to prevent people who have not paid for it from having access to it.

- **Non-rivalrous?** For any level of production, the cost of providing the good to a marginal (additional) individual is zero.

Maybe its just a case of very nonlinear network externalities? **u(x)**
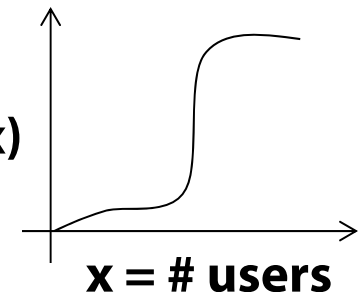
x = # users

Or, forget the transition & make IPv4 allocation efficient!

Lots of addresses are allocated but not used – so redistribute using auctions!

- This is already happening, without a formal auction mechanism (i.e. ARIN)
- **[Edleman & Swartz 2011]** an auction for IPv4 address space.

NETWORKWORLD   News | Blogs & Columns | Subscriptions | Videos | Events | INS

◄ Previous Post   Next Post ►

Microsoft pays Nortel $7.5 million for IPv4 addresses

Bankrupt Nortel finds a buyer for 666K of its legacy IPv4 addresses, raising questions if the IPv4 black/grey market has arrived.

By _Microsoft Subnet_ on Thu, 03/24/11 - 3:35pm.

Subject: [apnic-talk] need help
From: Rajeev Garg <rajeev@aninetwork.in>
To: apnic-talk@lists.apnic.net
Wed, Jun 6, 2012 at 5:13 PM

Dear sir..

 Could you please help us in the matter of locating a user of APNIC who like to transfer its unused IPv4 IPs. As we are short of IPv4 and under APNIC transfer policy we need more IPv4 series…

So please reply as soon as possible..

Or, forget the transition & make IPv4 allocation efficient!

Lots of addresses are allocated but not used – so redistribute using auctions!

- This is already happening, without a formal auction mechanism (i.e. ARIN)
- **[Edleman & Swartz 2011]** an auction for IPv4 address space.

Aggregation in routing impose constraints on the auction:

Link B

Link A

Link C
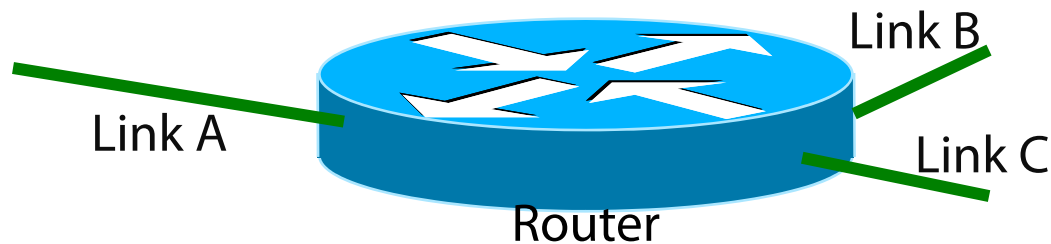
Router

Routing table

Dest. IP Prefix	Out link
74.125.*.*	B
74.125.127.*	C
74.125.1.*	C
74.200.*.*	B

Tx: 10.160.72.85

Rx: 74.125.127.99

IPv4

...e routed the same way

Fewer prefixes ➜ shorter routing table ➜ cheaper & faster routing

Today, with 2^{32} addresses, only about 400K prefixes used

So the auction should break up address space into as few prefixes as possible.

[Edleman & Swartz 2011] IPv4 address auction

Sellers can sell to multiple buyers; buyers can buy from only 1 seller.

"Spartan rule": After each trade, one agent becomes **extinguished**.

An extinguished agent cannot engage in further trades.

/8
(2^{24} addresses)

/9
(2^{22} addresses)

/10

/10

/11

/11

/11

/11

etc
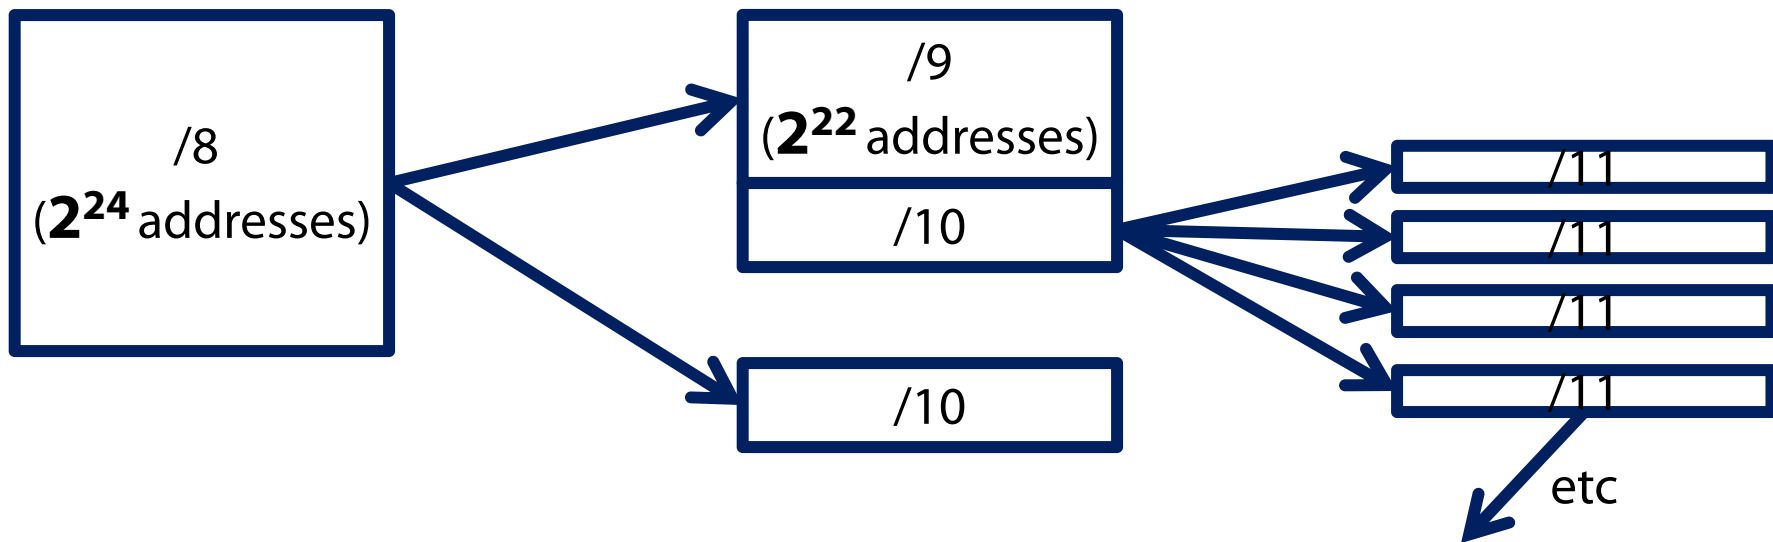
Goal: Find minimal allocation (fewest outgoing edges from each block).

Thm [E&S'11]: A spartan allocation with N buyers has at most N cuts.

Thm [E&S'11]: There is a spartan allocation for every minimal allocation.

Note: No algorithm given to find spartan allocation.

What will happen next?

Interlude: IPsec - a success story

IPsec was standardized at same time at IPv6 but has been adopted. Why?

- It's compatible with IPv4 and IPv6 – no changes to the packet headers.

- Has incentives for adoption: security & VPN (virtual private network).

- Allows traffic to be encrypted and authenticated.
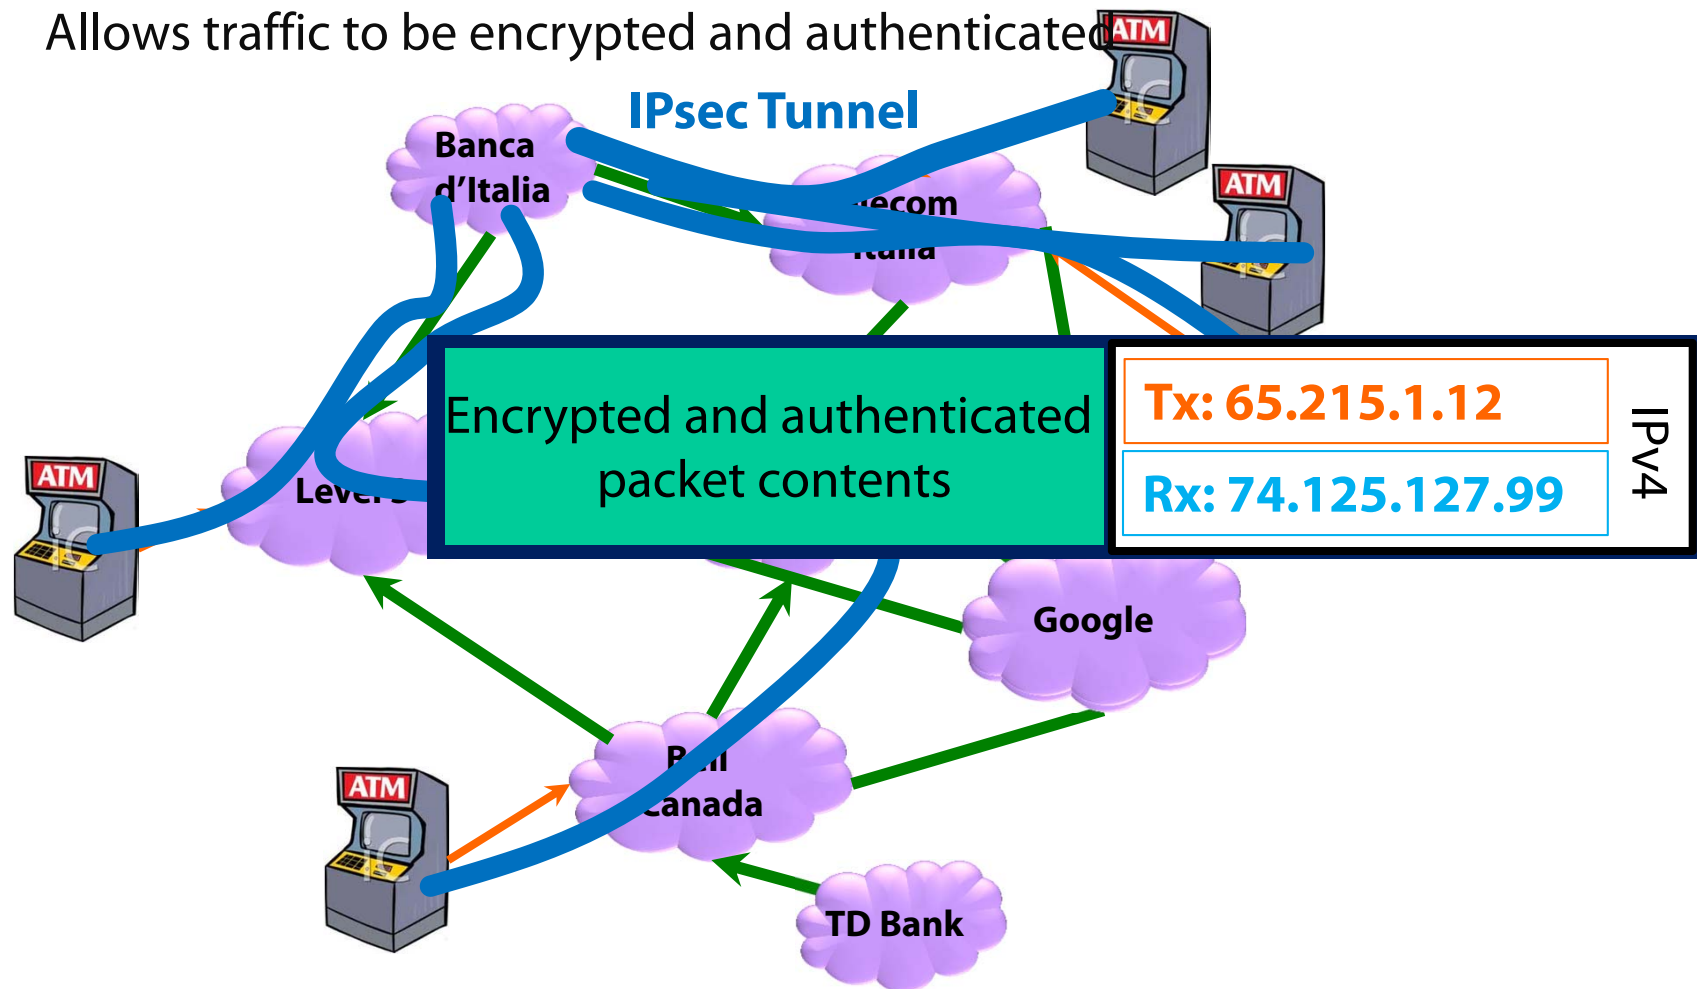
Adoption of routing (BGP) security
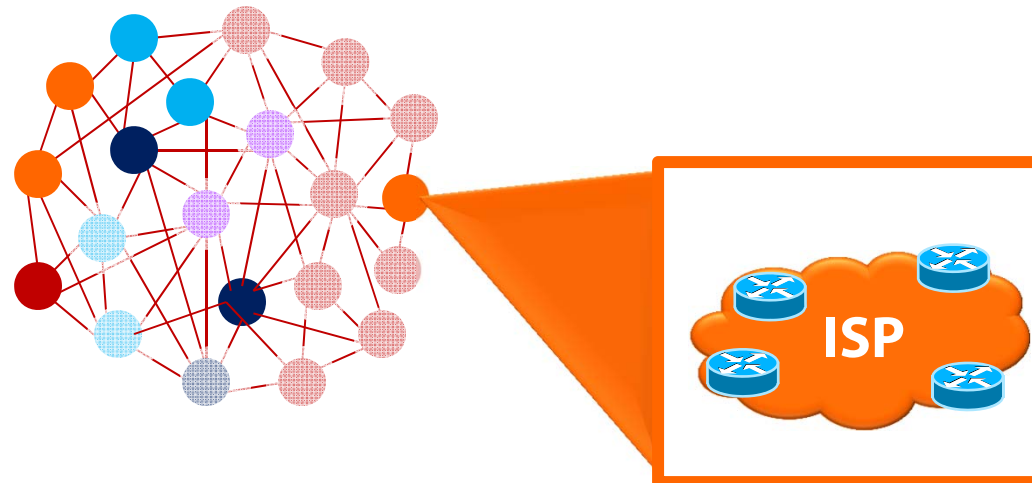
A technology that may be rolled out in ~5 years:
1) It's compatible with the installed base, but
2) It imposes a network externality on a graph, and
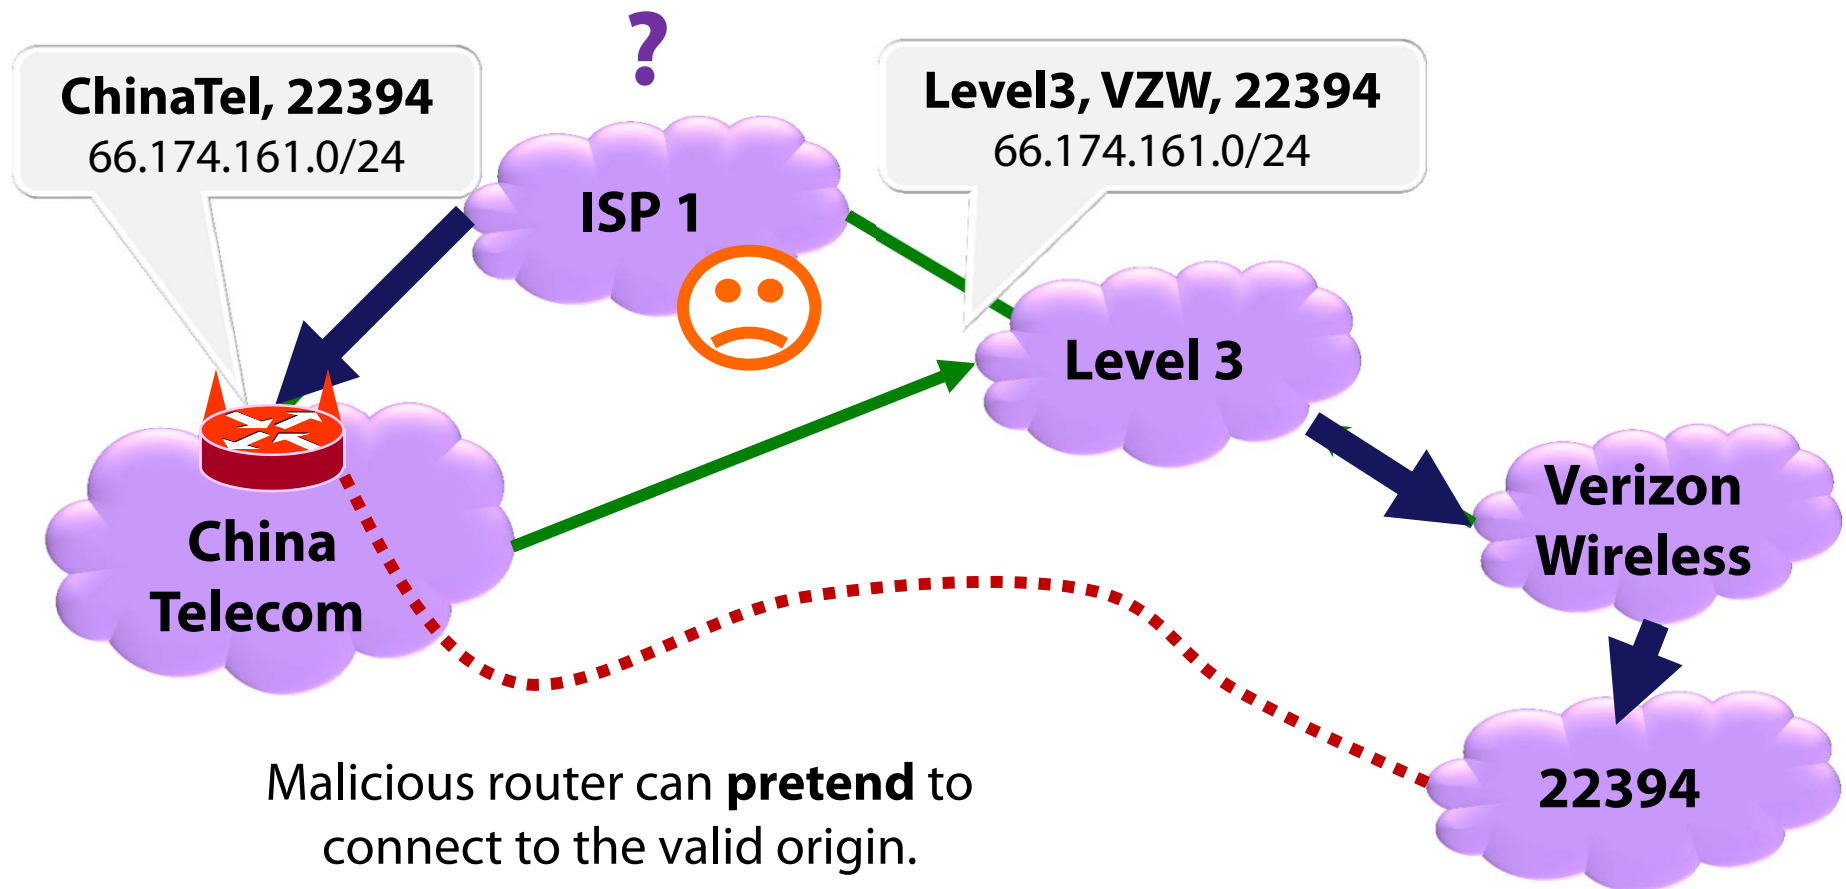3) Interacts with the payment structure in the Internet
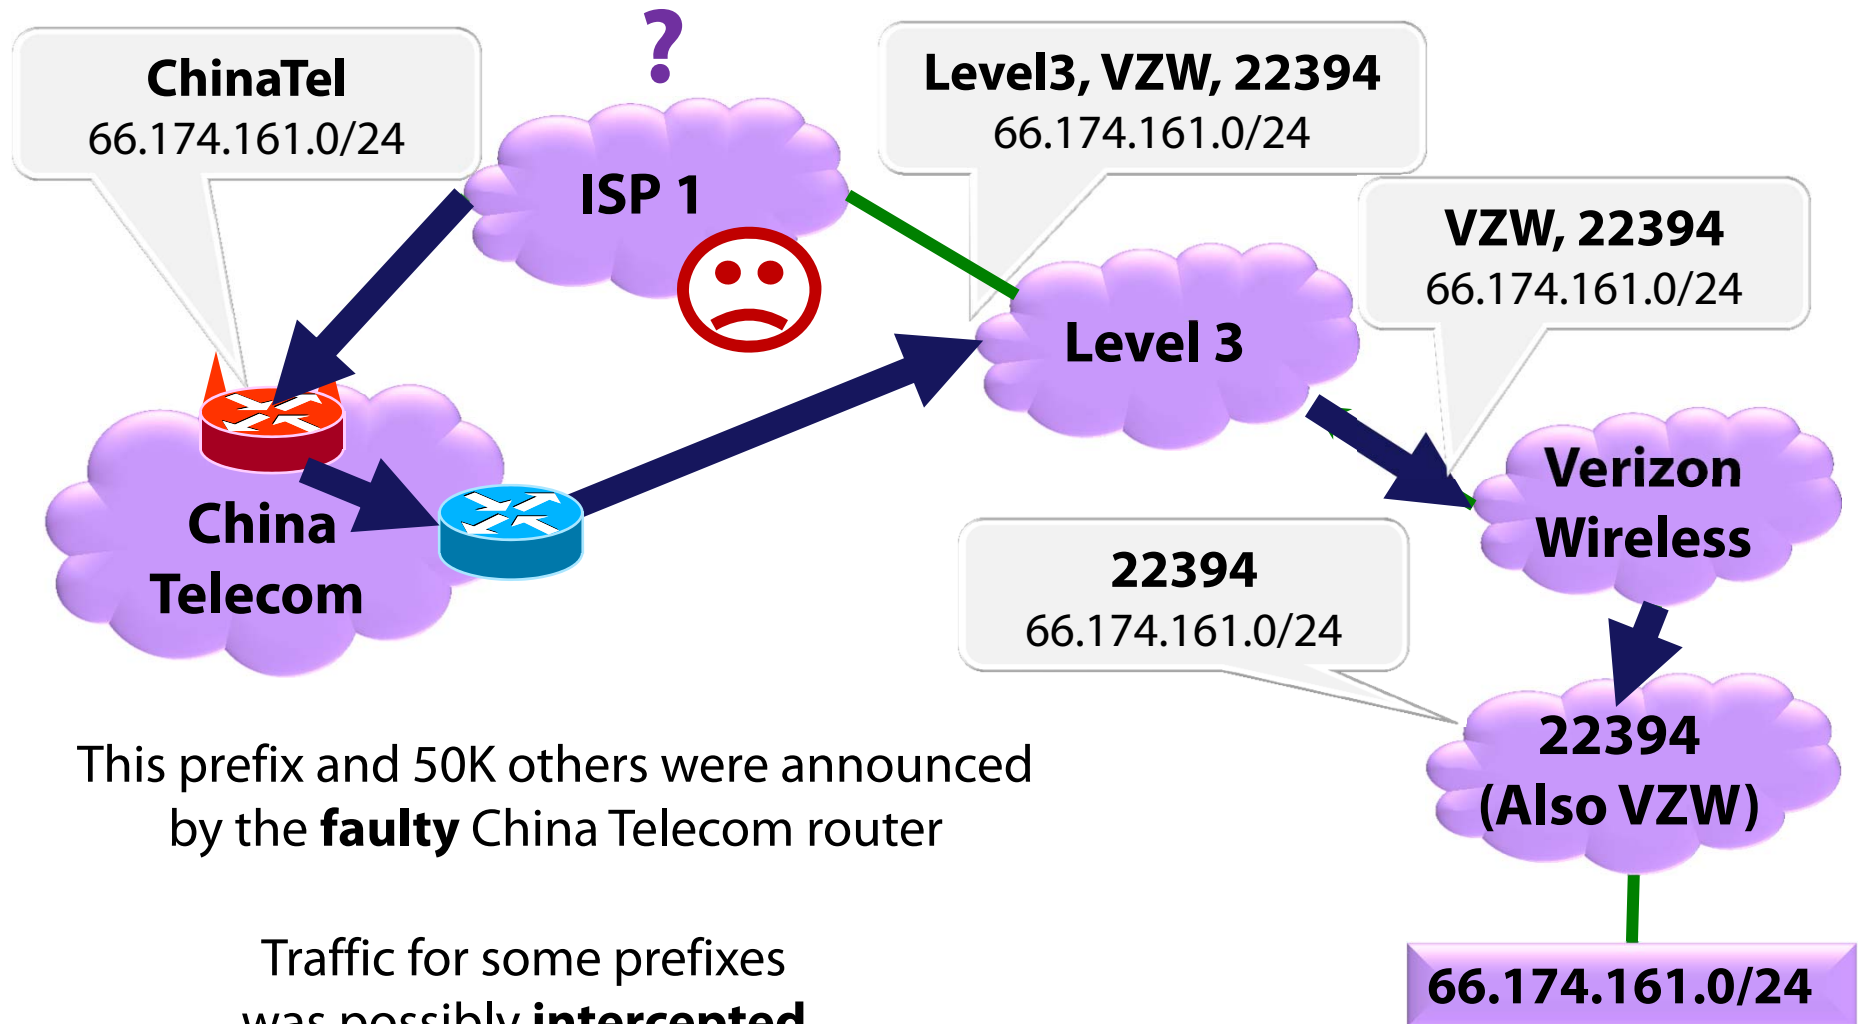
Currently under deployment : The RPKI

Resource Public Key Infrastructure (RPKI): Certified mapping from Autonomous Systems to public keys and IP prefixes.

RPKI: Invalid!

China Telecom
66.174.161.0/24

?

ISP 1

Level3, VZW, 22394
66.174.161.0/24

Level 3

China Telecom

Verizon Wireless

22394

RPKI shows China Telecom is not a valid origin for this prefix.
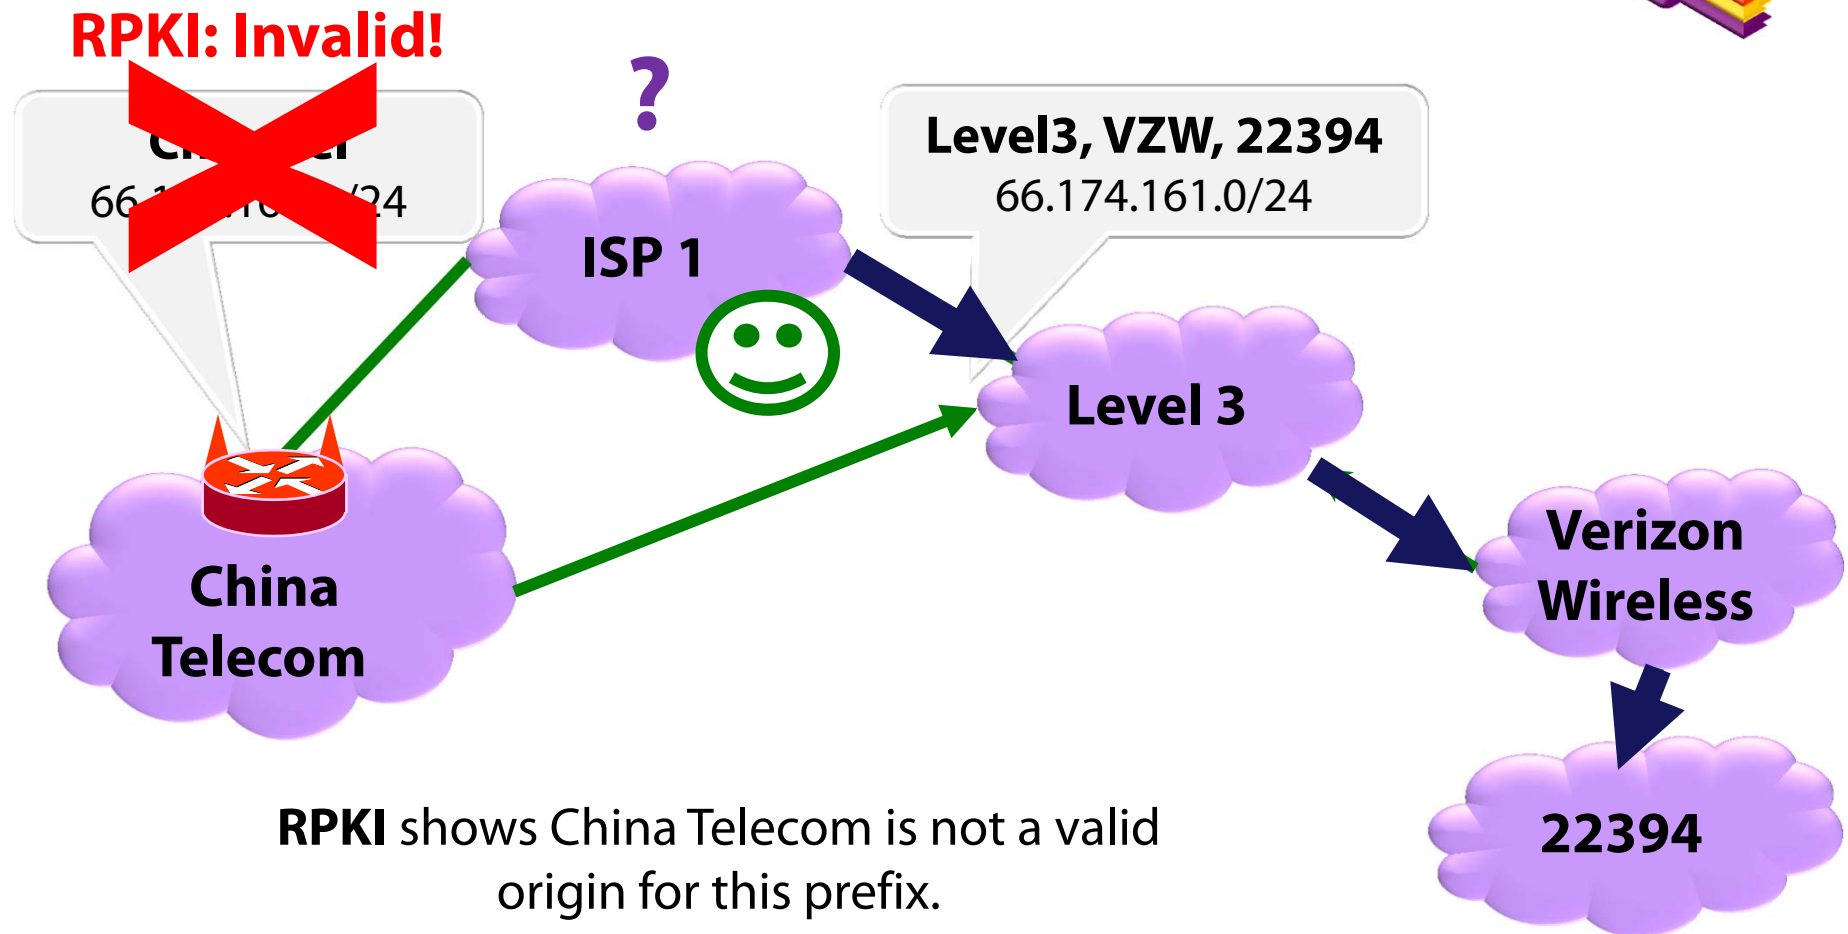
But RPKI alone is not enough!

Resource Public Key Infrastructure (RPKI): Certified mapping from Autonomous Systems to public keys and IP prefixes.
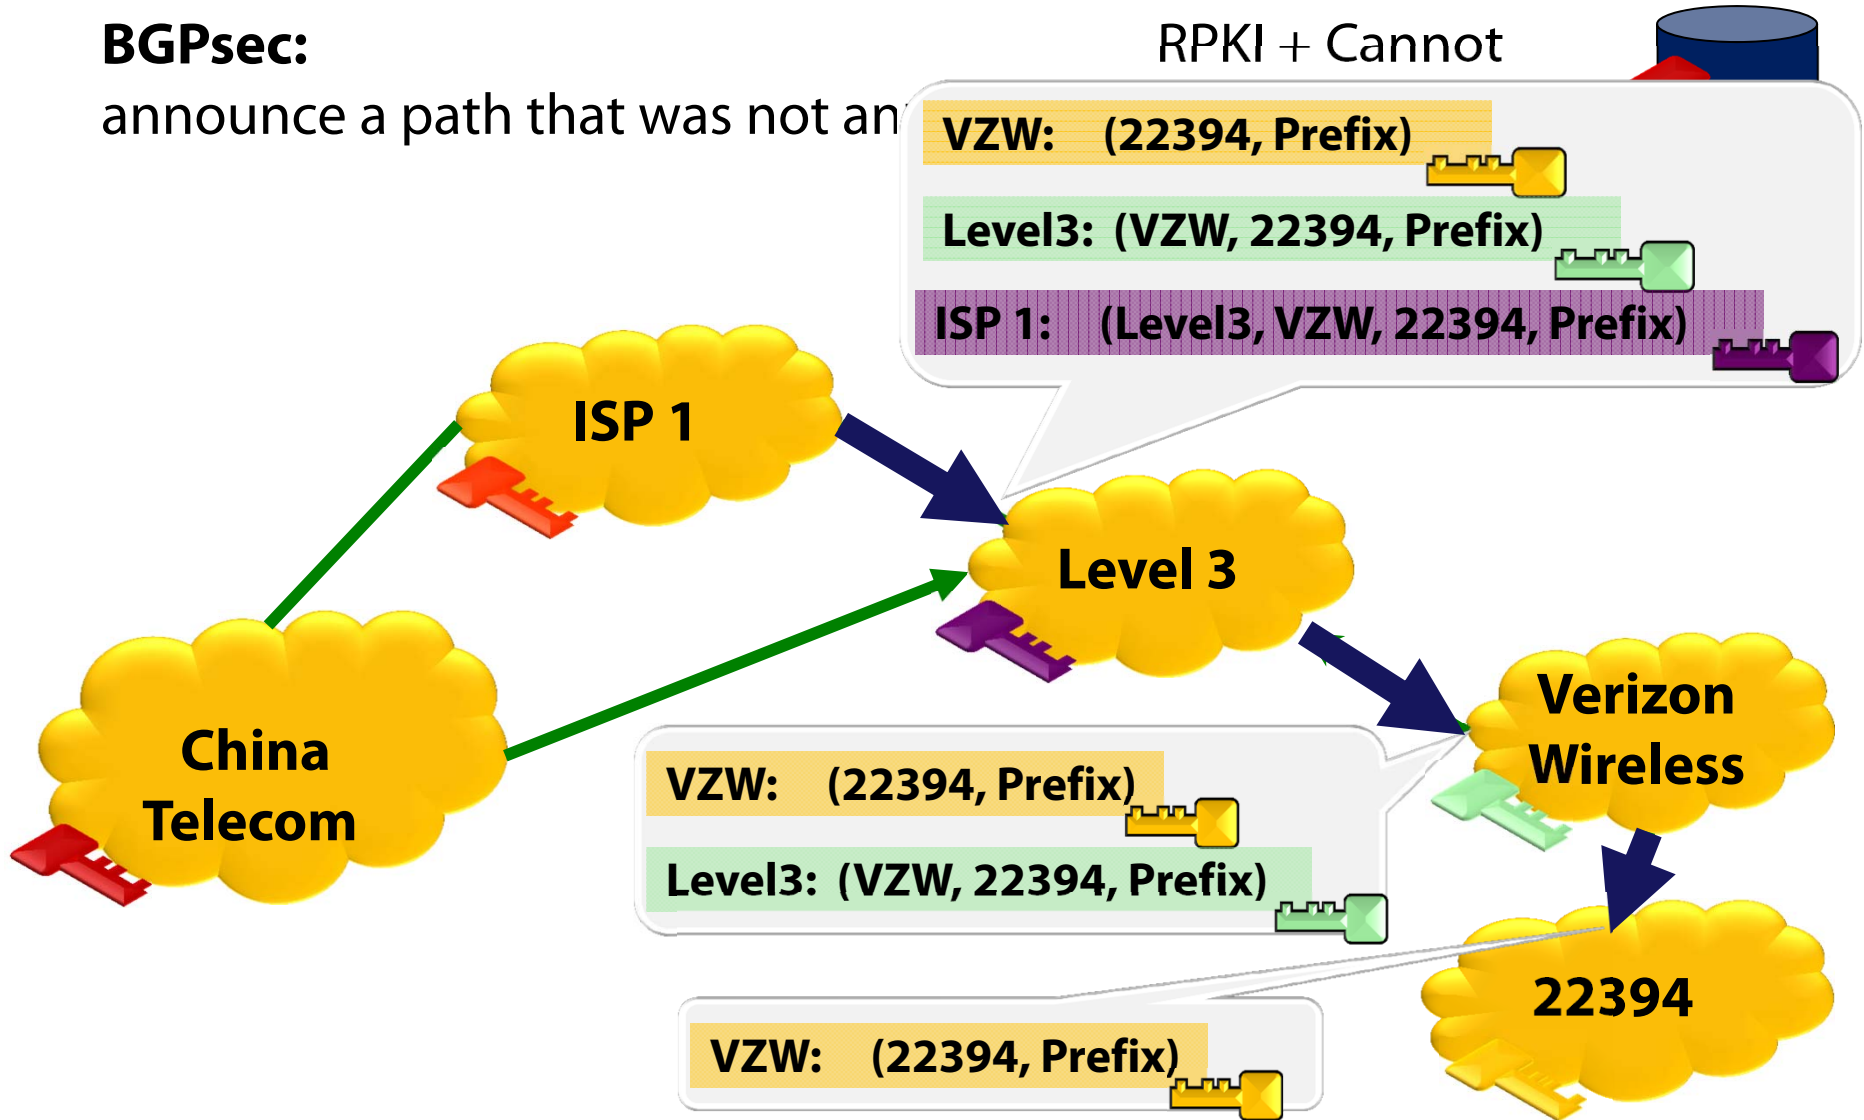

Malicious router can **pretend** to connect to the valid origin.

To stop this attack, we need BGPsec (1)

BGPsec:

announce a path that was not an...

RPKI + Cannot

VZW: (22394, Prefix)

Level3: (VZW, 22394, Prefix)

ISP 1:   (Level3, VZW, 22394, Prefix)

ISP 1

Level 3

Verizon Wireless

China Telecom

VZW: (22394, Prefix)

Level3: (VZW, 22394, Prefix)

22394

VZW: (22394, Prefix)

Public Key Signature: Anyone with 22394's public key can validate that the message was sent by 22394.
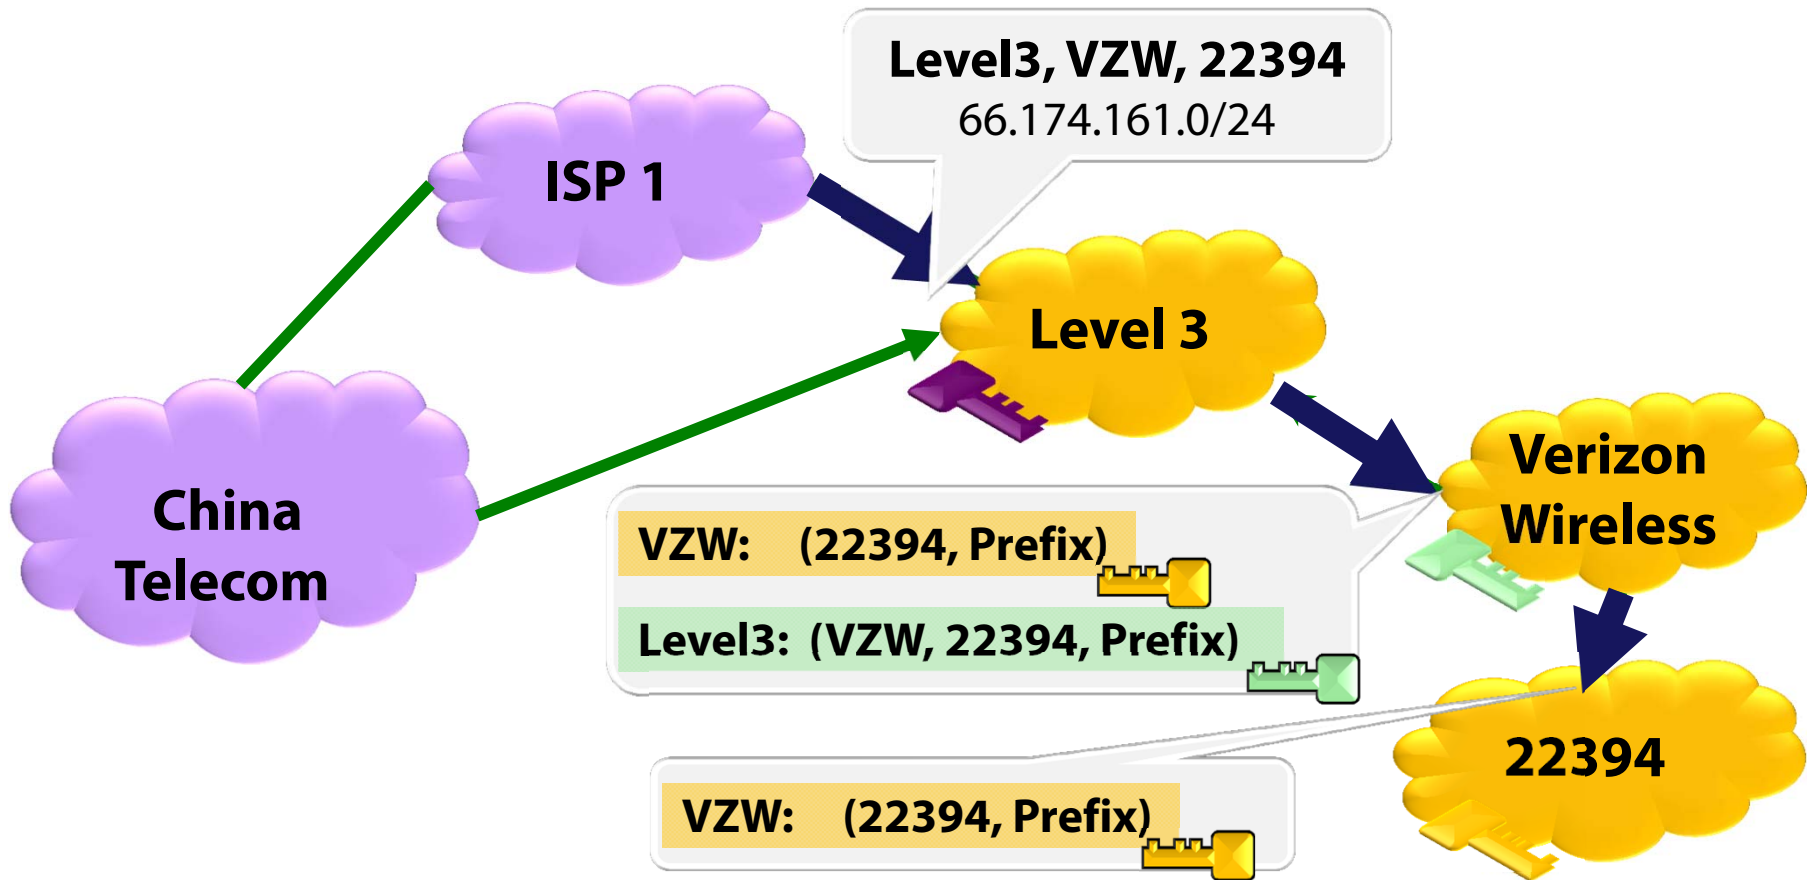
To stop this attack, we need **BGPsec** (2)

BGPsec:

announce a path that was not annou...

RPKI + Cannot

VZW: (22394, Prefix)

Level3: (VZW, 22394, Prefix)

ISP 1: (Level3, VZW, 22394, Prefix)

ISP 1

Level 3

China Telecom

Verizon Wireless

22394

Malicious router **can't** announce a direct path to **22394**, since **22394** never said

ChinaTel: (22394, Prefix)
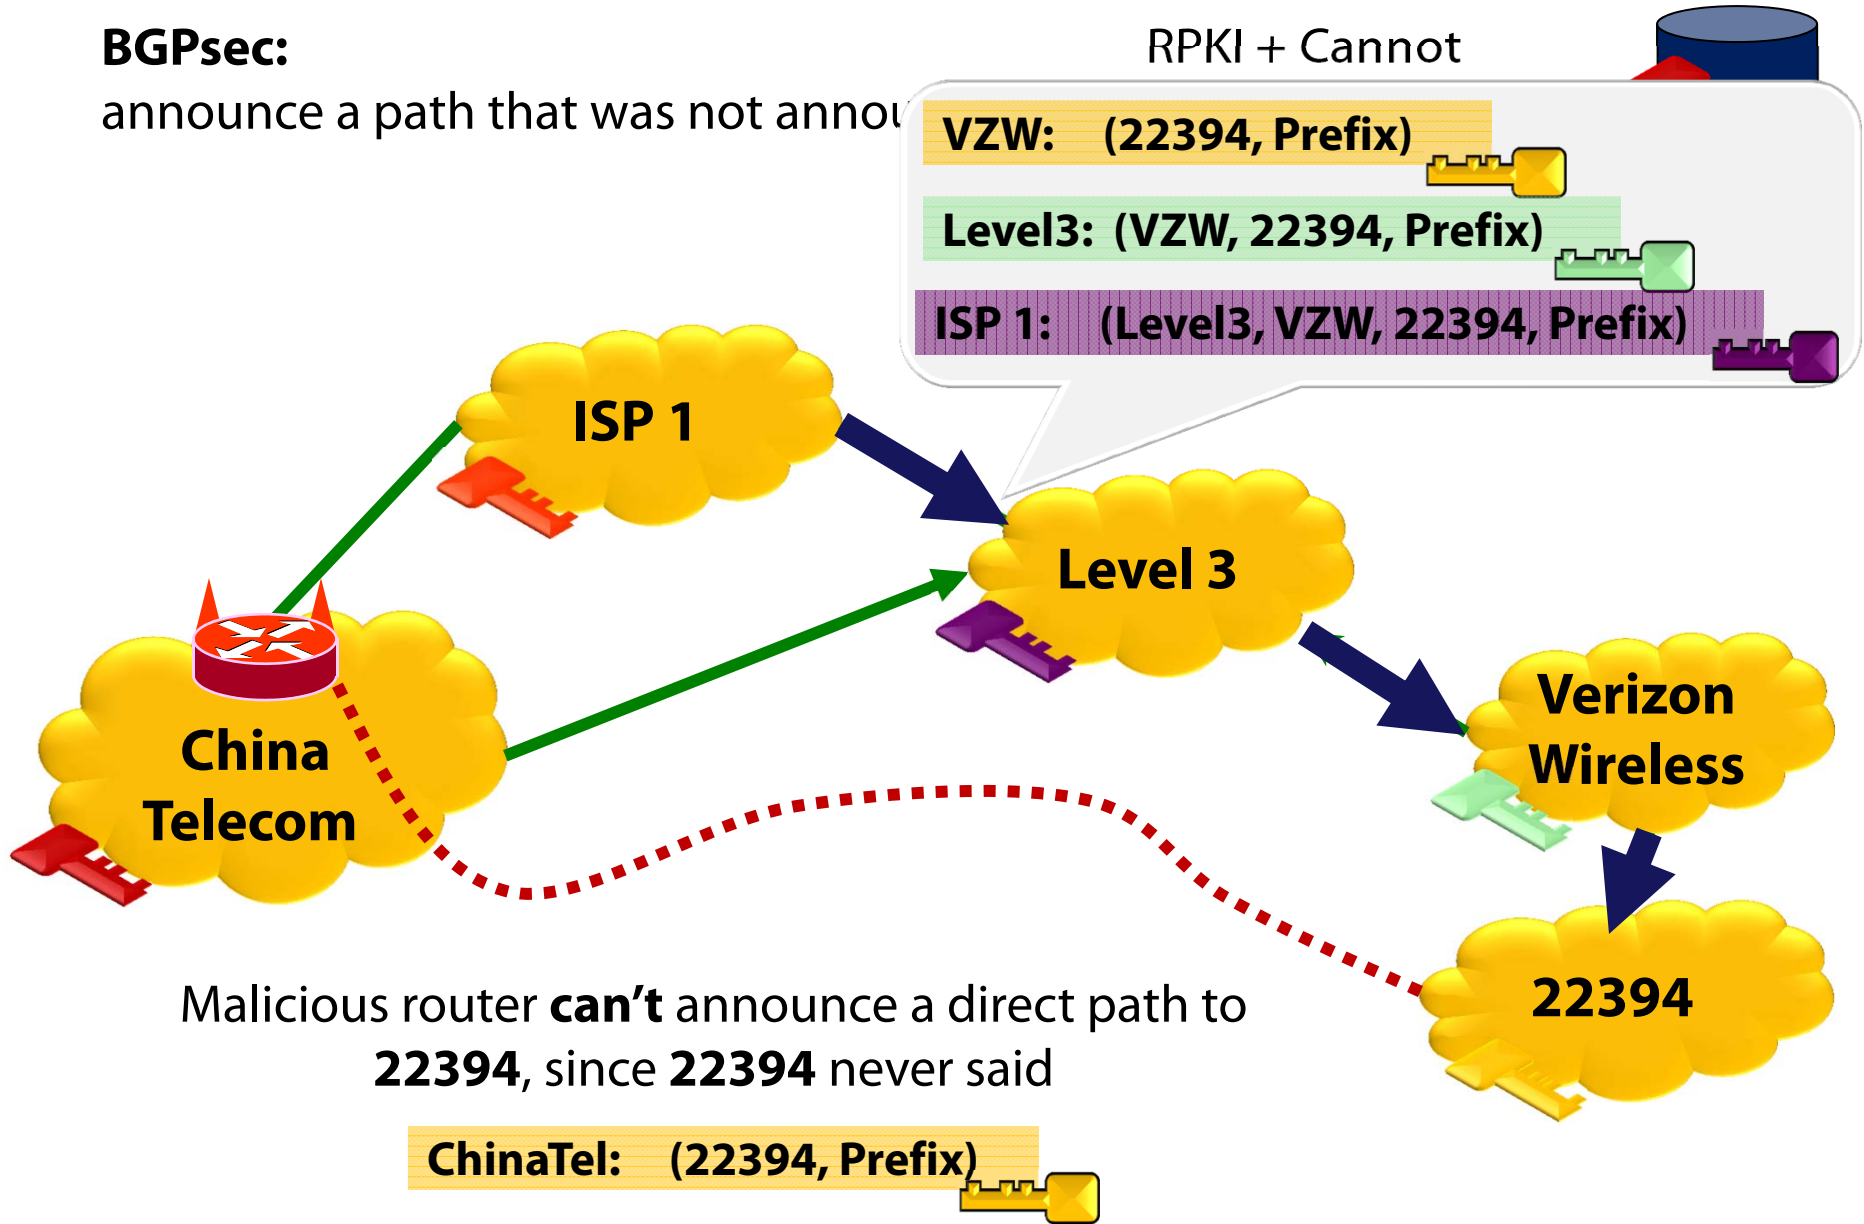
We learned a lesson on backwards compatibility

Any device that doesn't have BGPsec will see a plain old BGP announcement!

Level3, VZW, 22394
66.174.161.0/24

ISP 1

China Telecom

Level 3

Verizon Wireless

22394

VZW: (22394, Prefix)

Level3: (VZW, 22394, Prefix)

VZW: (22394, Prefix)

Why is it taking so long to deploy BGPsec?

RPKI is a necessity: But now it's finally happening! (Slowly.)

Local incentives for deployment of BGPsec?

- ASes are economically-motivated agents.
- Security benefits only kick-in when **all ASes on a path** deploy
  - As with IPv6 where quality degrades if not all ASes on path handle IPv6.

We've seen similar problems before:

- Technology diffusion in social networks **[Morris'00], [Kempe et.al. '03]**
  - But, utility only depends on immediate neighbors
  - Here it depends on full paths

Why upgrade if (security) benefits don't kick in unless everyone else does?

43284

Overview of work on diffusion of BGPsec

Goal: Develop guidelines for BGPsec deployment.

- Which early adopters lead to cascading BGPsec deployment?
- How should BGPsec interact with routing decisions?

How to evaluate these guidelines?

1. **Develop model:**
   - Model ISP utility. Model routing (Shortest-path? Economics?)
   - Game: ISPs myopically upgrade if utility > threshold
2. **Analyze model: (**Tractability? Convergence?)
3. **Simulations:**
   - Use empirical graphs **G(V,E)** of Internet **[UCLA Cyclops]**
   - Simulate the deployment process using guidelines + model

Why would ISPs adopt BGPsec?

[**G. & Liu 2012**] Because they can use it to communicate with other ISPs

[**Gill, Schapira, G. 2011**] Because they want to make money!

Technology diffusion in internetworks [G. Liu 2012]
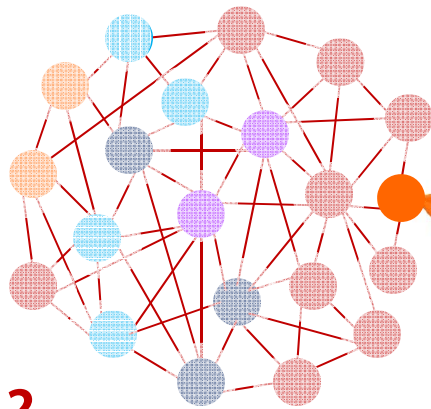
Captures why its so hard to deploy new technologies like (
IPv6, and **secure BGP,**

ISP

I'll adopt the innovation if I can use it to communicate with at least θ other Internet Service Providers (ISPs)!

θ = 2
θ = 3
θ = 12
θ = 15
θ = 16

Our model of node utility: Node **u**'s utility depends on the size of the connected component of active nodes that **u** is part of.

eg. utility(**u**) = 5
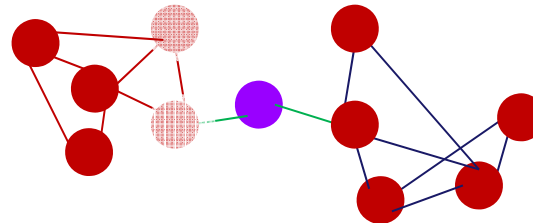
Seedset: A set of nodes that can kick off the process.
Policy makers, regulatory groups can target them as early adopters!

Optimization problem: Given the graph and thresholds,
what is the smallest seedset that can cause the entire network to adopt?

Social networks (Local) vs Internetworks (Non-Local)

Minimization formulation: Given the graph and thresholds **θ**, find the smallest seedset that activates every node in the graph.

Local influence: **Deadly hard!**

Thm [Chen'08]: Finding an $O(2^{\log^{1-\varepsilon}|V|})$-approximation is NP hard.

Non-Local influence : **Much less hard.**

[G. Liu 2012]: An $O(r \cdot k \cdot \log |V|)$ approx algorithm

Maximization formulation: Given the graph, assume **θ's are drawn uniformly at random**. Find seedset of size **k** maximizing number of active nodes.

Local influence: **Easy!**

Thm [KKT'03]: An $O(1-1/e)$-approximation algorithm.
How? 1) Prove submodularity. 2) Apply greedy algorithm.

Non-Local influence: **?**

[G. Liu 2012]: The usual submodularity tricks fail.

[G. Liu 2012] Results

Minimization formulation: Given the graph and thresholds **θ**, find the smallest seedset that activates every node in the graph.

Main result: An $O(r \cdot k \cdot \log |V|)$ approx algorithm

r is graph diameter (length of longest shortest path)
k is threshold granularity (number of thresholds)

Lower Bound: Can't do better than an $\Omega(\log |V|)$ approx.
(Even for constant **r** and **k**.)

Lower Bound: Can't do better that an $\Omega(r)$ approx. with our approach.

What if ISPs value revenue above security?

Pessimistic view:

• No local economic incentives; only security incentives.

• Similar to IPv6 (except we have backwards compatibility)

> "ISPs would be the ones forced to upgrade all of their equipment to support this initiative, but how would it benefit them?
> As commercial companies, if there is little to no benefit (potential to increase profit), why would they implement a potentially costly solution?
> The answer is they won't."
>
> **[http://www.omninerd.com/articles/Did_China_Hijack_15_of_the_Internet_Routers_BGP_and_Ignorance]**
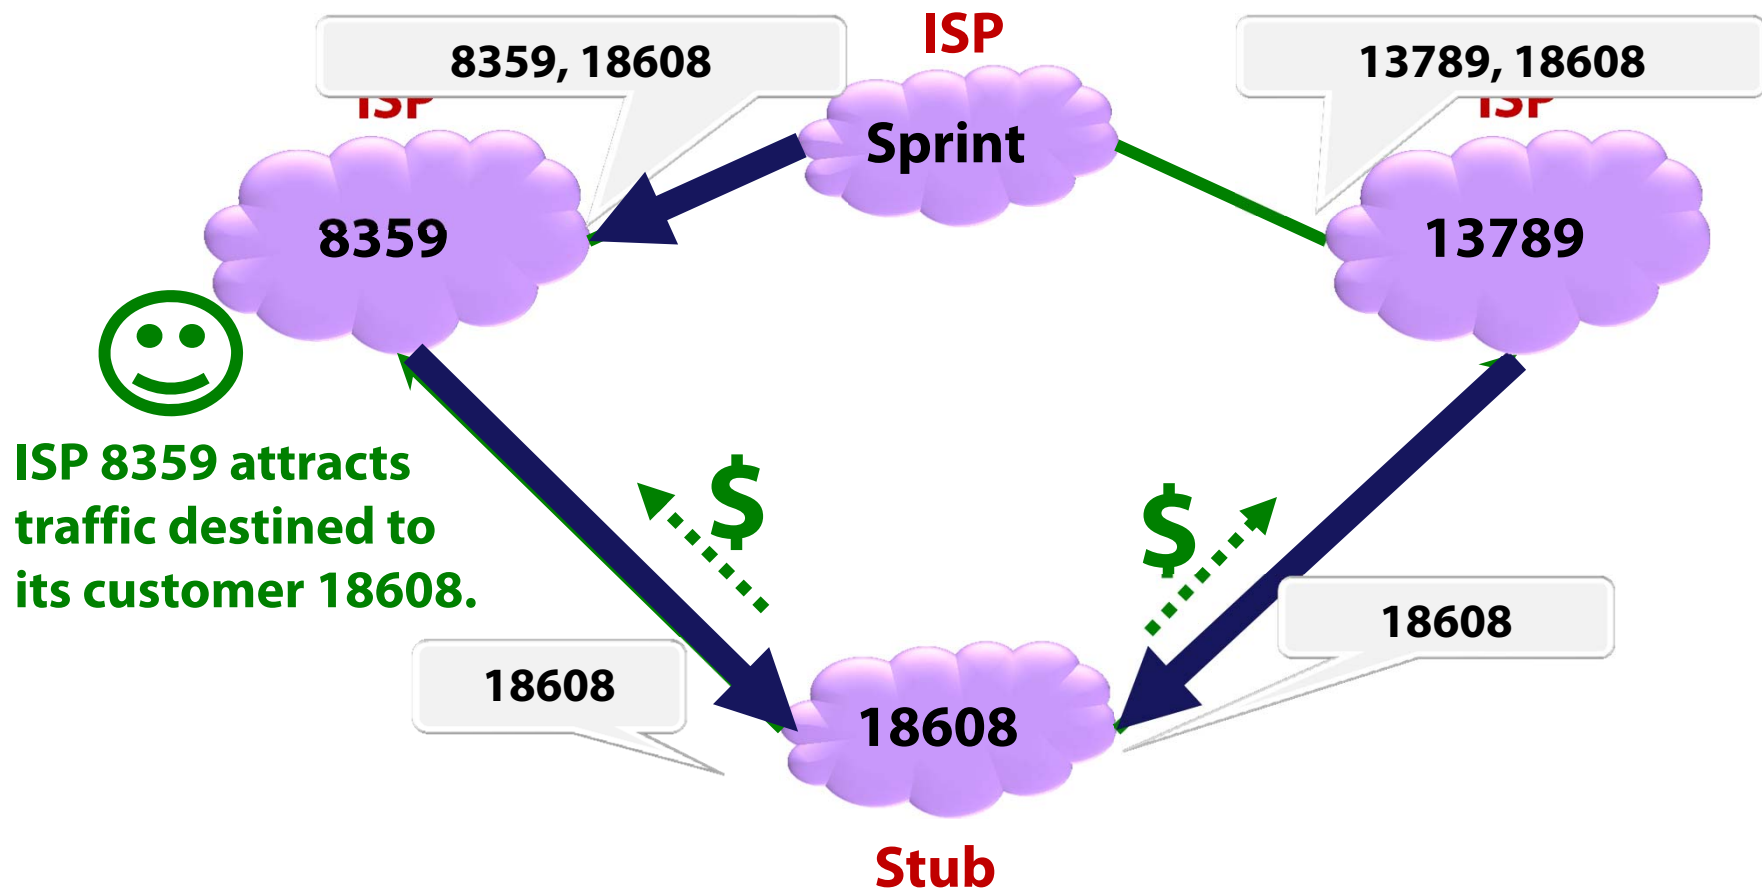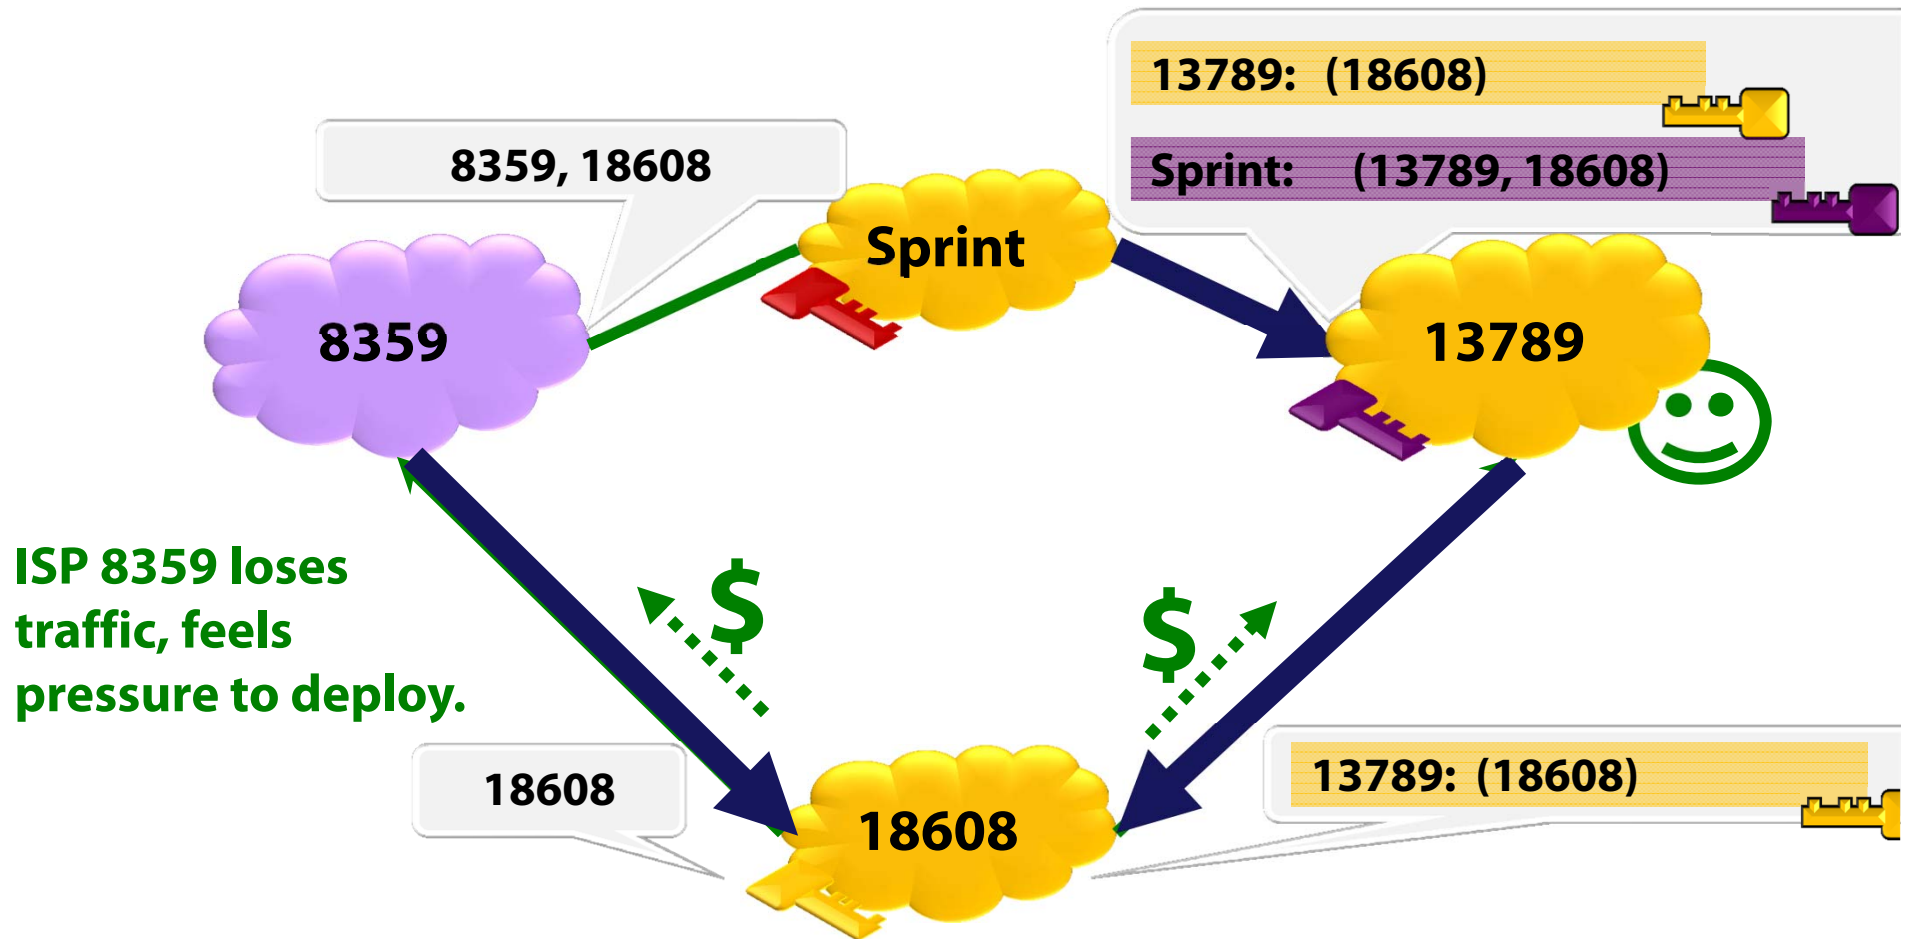
[Gill, Schapira, G. 2011] Guidelines for deploying BGPsec

1. **Secure ISPs *at least* break ties in favor of secure paths**

2. **A few early adopters initially deploy BGPsec** (A least 5 biggest ISPs)

3. **ISPs deploy simplex BGPsec in their stub customers**

Bank of A

ISP

Boston U
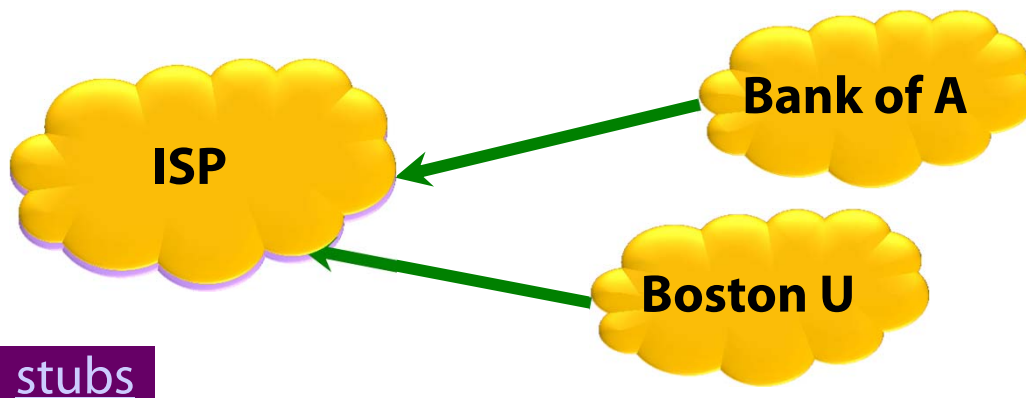
stubs

(Gov't should subsidize ISPs that do this.)

Stub with Simplex BGPsec:

- Need only sign; trusts provider to validate.

- Minor security impact

- No hardware upgrade!

**Crucial, since
85% of ASes are stubs!**

[Gill, Schapira, G. 2011] model

- **To start the process:**
  - Early adopter ASes become secure
  - Their **stub customers** become secure (e.g. simplex BGPsec)

- **Each round:**
  - Compute **utility** for every insecure ISP (Number of source ASes routing through ISP n to all customer destinations).

  BGP Routing Policy Model:

  1. Customer > peer > provider paths

  2. Prefer shorter paths

  3. If secure, prefer secure paths

  4. Arbitrary tiebreak
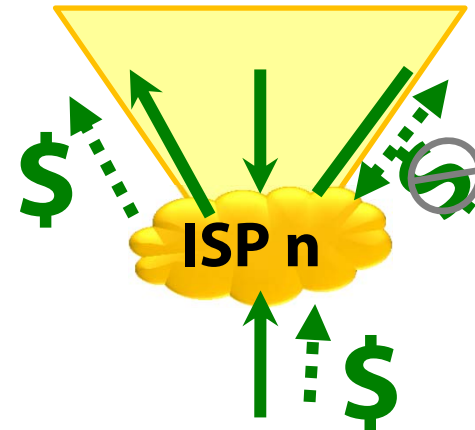
  - If **ISP n** can increase utility by more than **θ%** by becoming secure
  - … then **ISP n** secures itself & all its stub customers

- **Stop when no new ISPs decide to become secure.**

[Gill, Schapira, G. 2011] : Results

Thm: An ISP has no incentive to undeploy BGPsec.

 Cor: The game terminates.

Thm: Choosing the optimal set of early adopters in NP Hard.
(Reduction from set cov

Use heuristics & simulations instead…
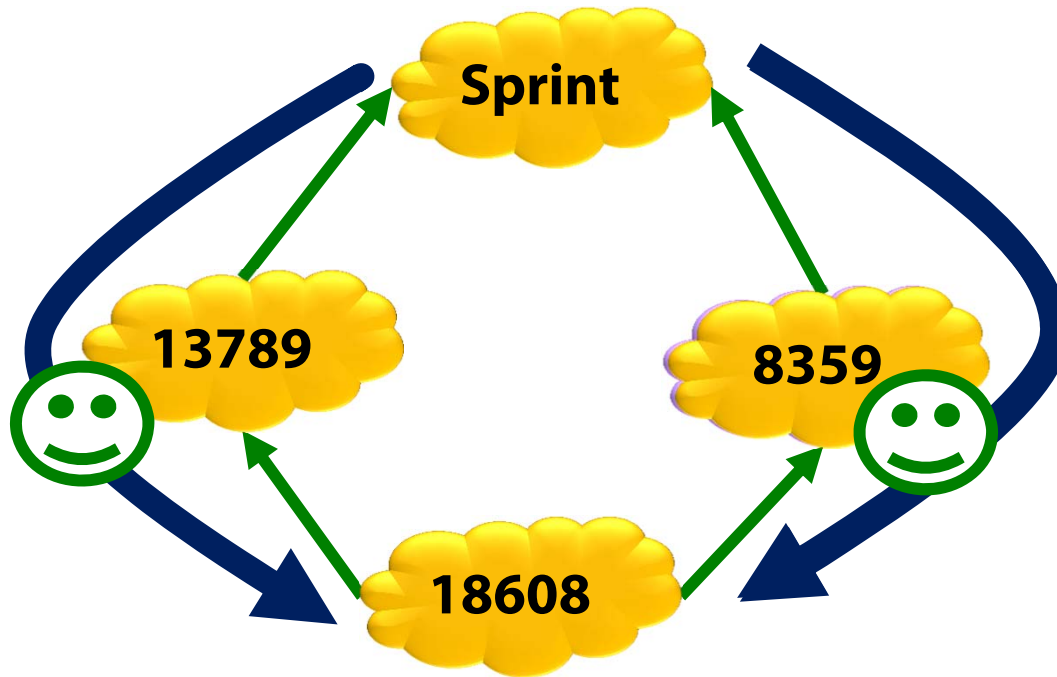
Case study: Ten early adopters, heuristically chosen:

- Five high-degree ISPs: (Sprint, Verizon, AT&T , Level 3, Cogent)

- Five big Content Providers (Google, Microsoft, Facebook, Akamai, Limelight)

- The five content providers source 10% of Internet traffic

- All nodes have the same threshold $\theta = 5\%$.

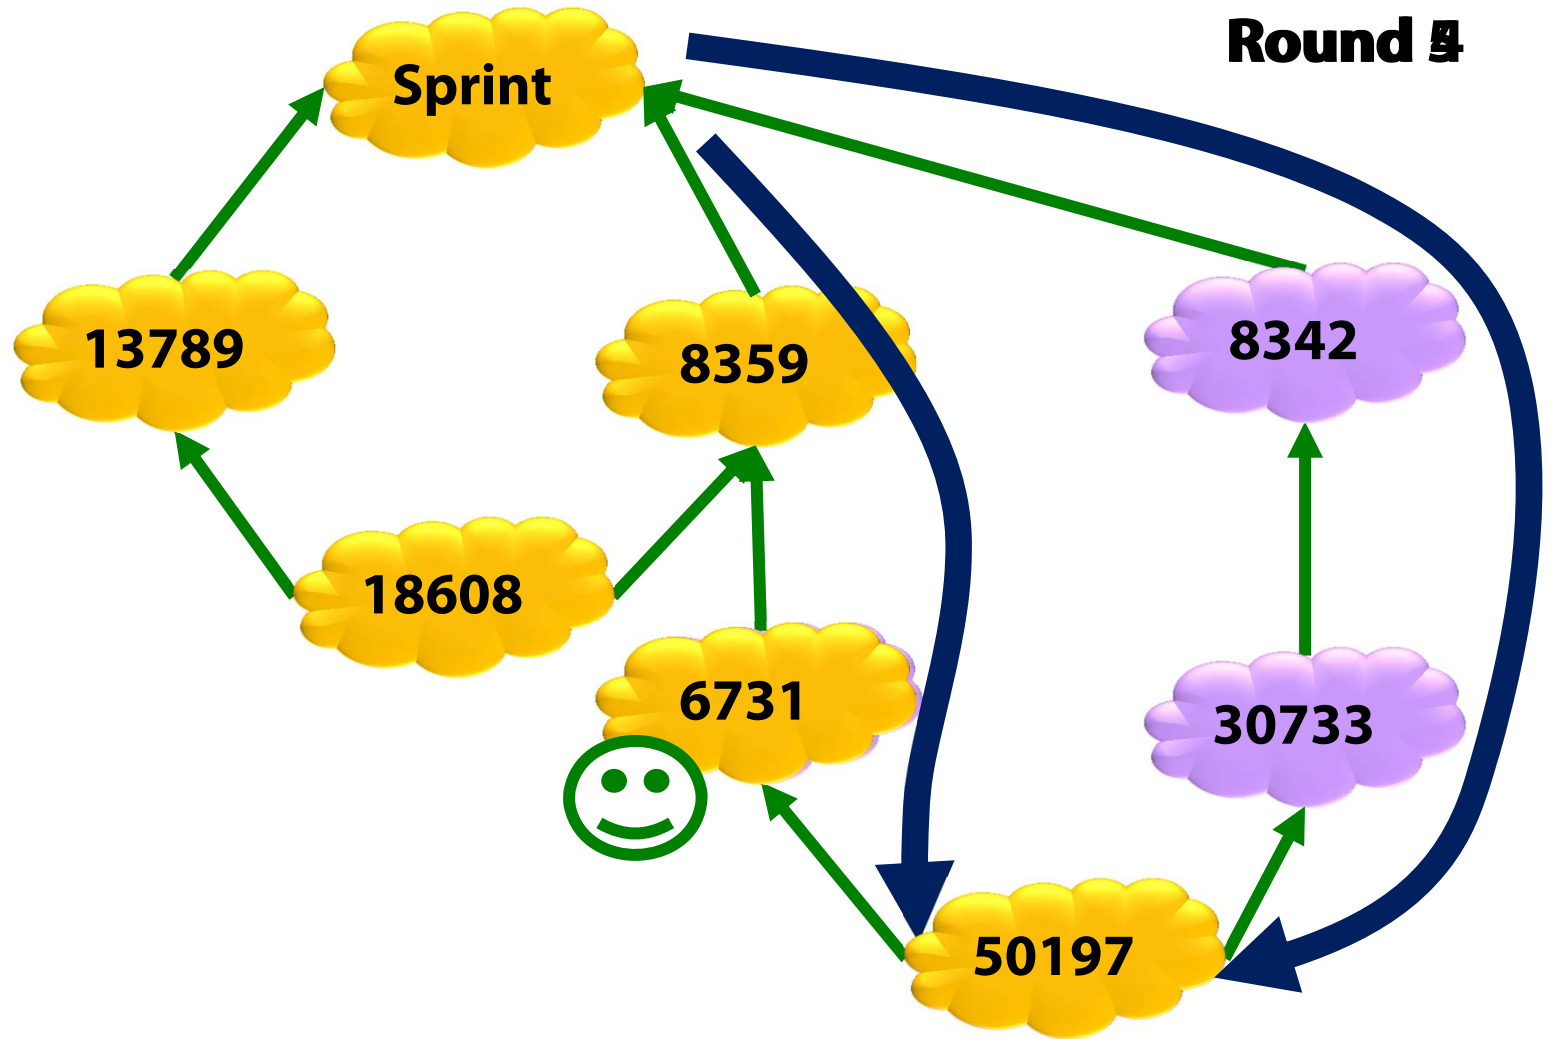- **Leads to 85% of nodes to deploy BGPsec!**

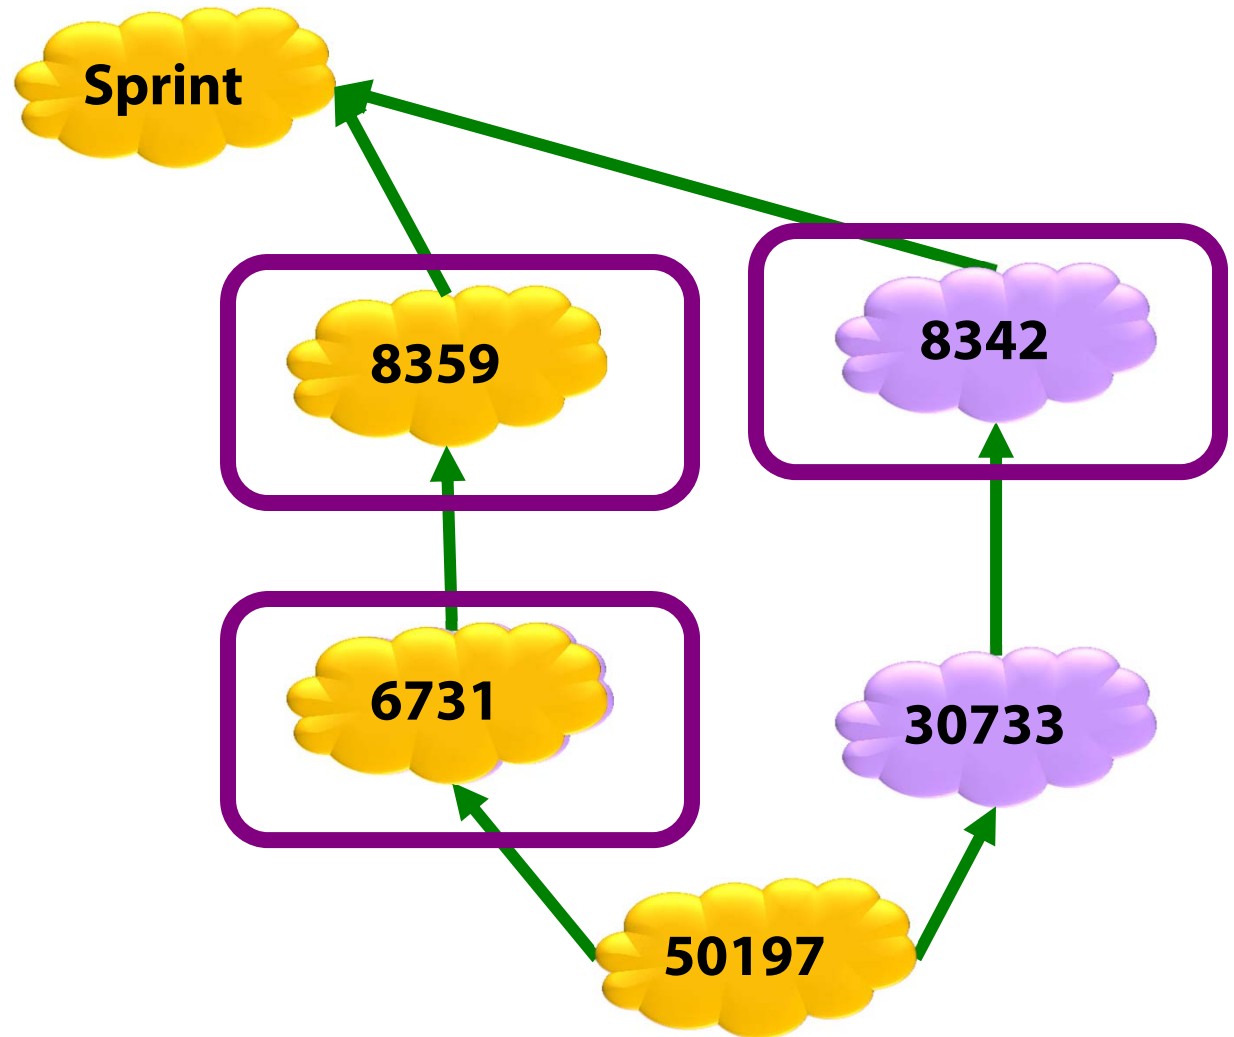# [Gill, Schapira, G. 2011] : Simulations (1)

Round 0

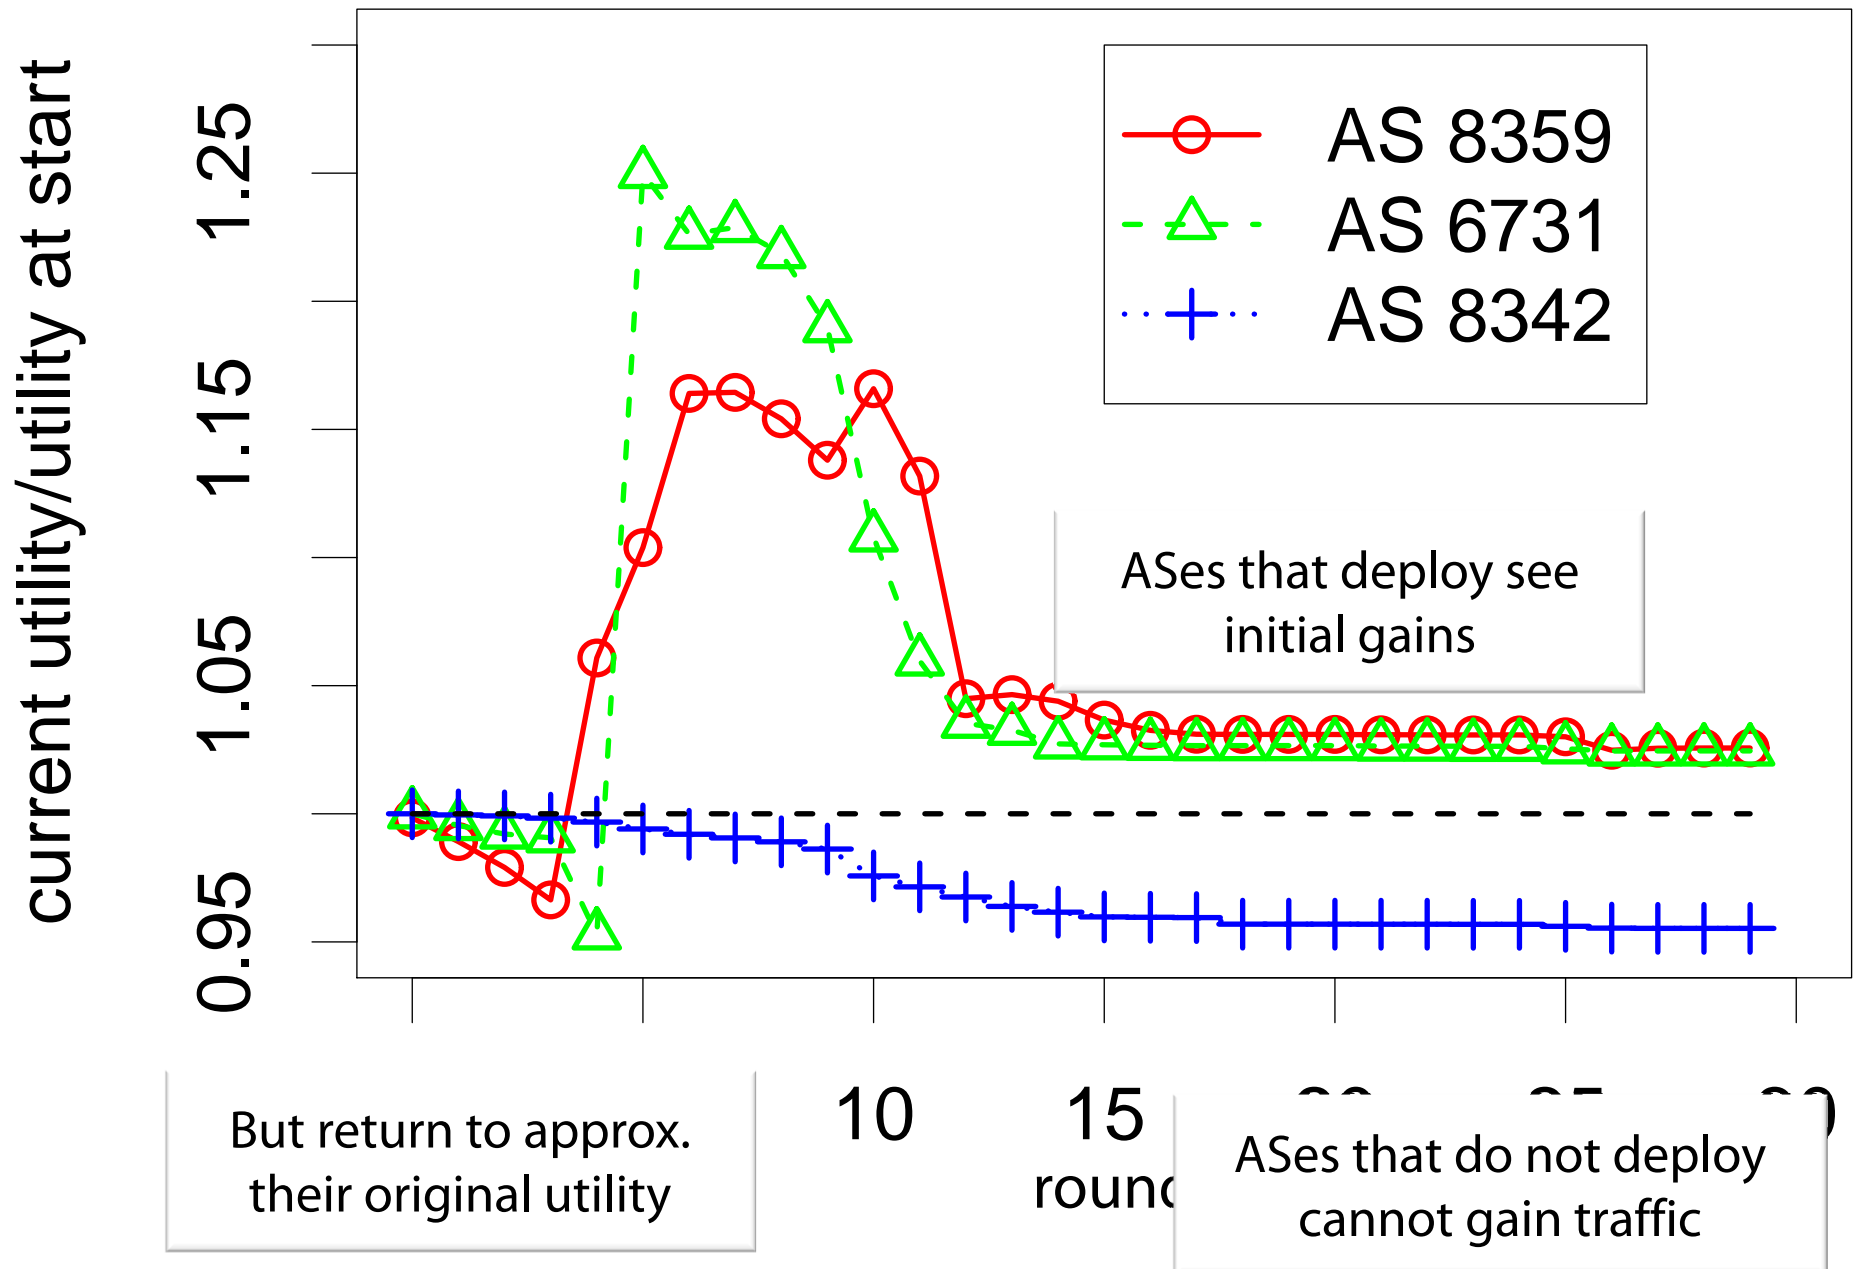# [Gill, Schapira, G. 2011] : Simulations (2)

Round 8

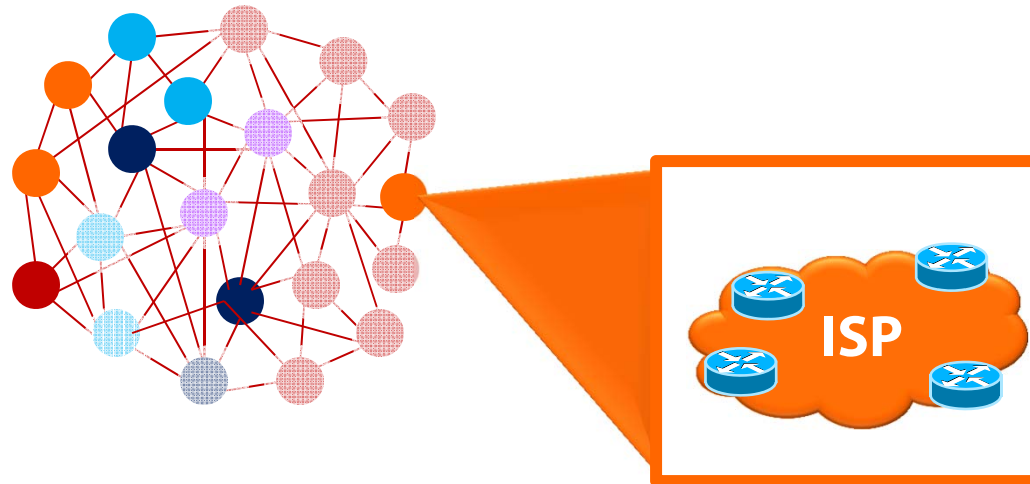# Changes in Utility as Deployment Progresses (1)

Zoom in on utility of each of these three ISPs...

Changes in Utility as Deployment Progresses (2)

ASes that deploy see initial gains

But return to approx. their original utility

ASes that do not deploy cannot gain traffic

Postlude: DNSSEC

A technology is being rolled out today!
1) Both hierarchical and distributed network externality

Postlude: DNSSEC – a protocol we're rolling out now

DNSSEC was standardized at around the same time as IPv6

- Basic idea: Take DNS and add cryptographic digital signatures.
- They started thinking about this in mid-1990. Standards 1999, 2005, 2008.
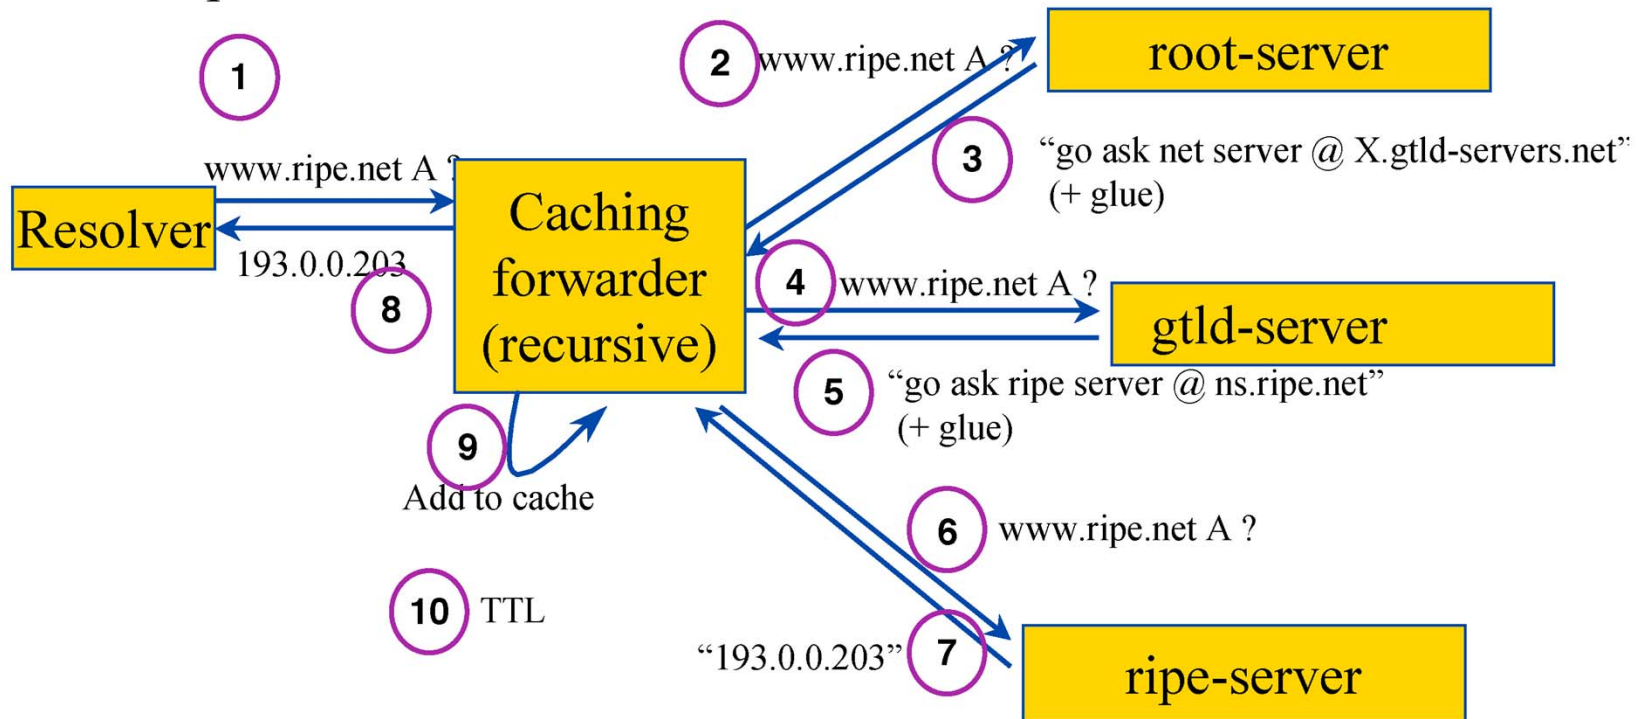
What's DNS?

- A distributed and hierarchical database mapping URLs etc to IP addresses.
- How to map **www.bu.edu** to an IP address?
- Recursively! Ask "root" how to find **.edu**
- Then ask **.edu** how to find **bu.edu**
- Then ask **bu.edu** how to map **www.bu.edu** to an IP address!

Reminder: DNS Resolving

Question:

www.ripe.net A

(1)

www.ripe.net A ?

Resolver

193.0.0.203

(8)

Caching forwarder (recursive)

(2) www.ripe.net A ? → **root-server**

(3) "go ask net server @ X.gtld-servers.net" (+ glue)

(4) www.ripe.net A ? → **gtld-server**

(5) "go ask ripe server @ ns.ripe.net" (+ glue)

(9) Add to cache

(6) www.ripe.net A ?

(10) TTL

"193.0.0.203" **(7)** → **ripe-server**

http://ws.edu.isoc.org/workshops/2004/ccTLD-Amsterdam/dnssec/ISOC_tld_2004.pdf

Traditional DNS

Add a public key to zone

Sign zone with private key

Give hash(pubkey) to parent

The root (".") → .com / HASH(KEY) → DNSKEY / xelerance.com
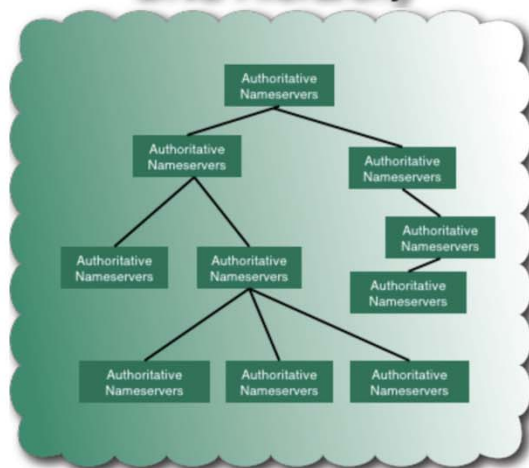
Rinse and Repeat

DNSSEC's
Chicken & Egg

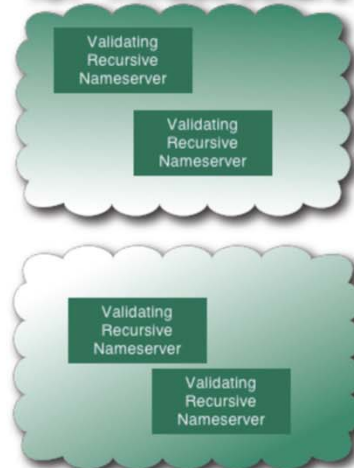*Why invest in signing while the signatures are not going to be validated*

Why invest in validation while there is nothing to validate

Why invest in development while there is no infrastructure?

DNS Hierarchy

ISP infrastructure

OS and Application Support

Postlude: DNSSEC – a protocol we're rolling out now

DNSSEC was standardized at around the same time as IPv6

- Basic idea: Take DNS and add cryptographic digital signatures.

- They started thinking about this in mid-1990. Standards 1999, 2005, 2008.

**Challenges of DNSSEC deployment:**

- Hierarchical: A nameserver can't deploy until its parent nameserver does.

- Distributed: Economically-motivated agents need incentives for deployment.

  - Agents are **nameservers** and **resolvers**

- Political: Who owns the keys to the root zone?

Where we are today?

- First "zone" to deploy in 2005 is Sweden, **.se**

- Root zone signed in 2010 (with key shared by 14 Internet "personalities"!)
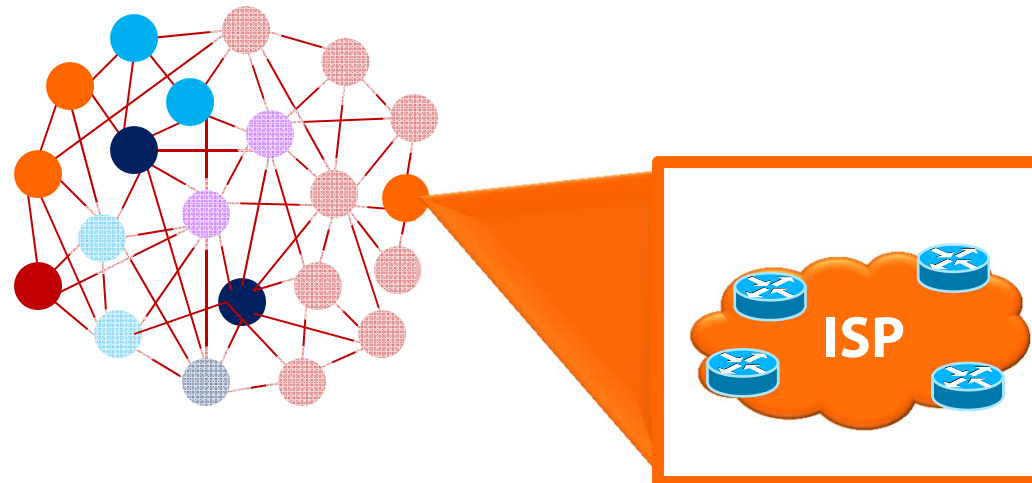
Deployment as of June 5, 2012 per UCLA's SecSpider

Production Islands of trust
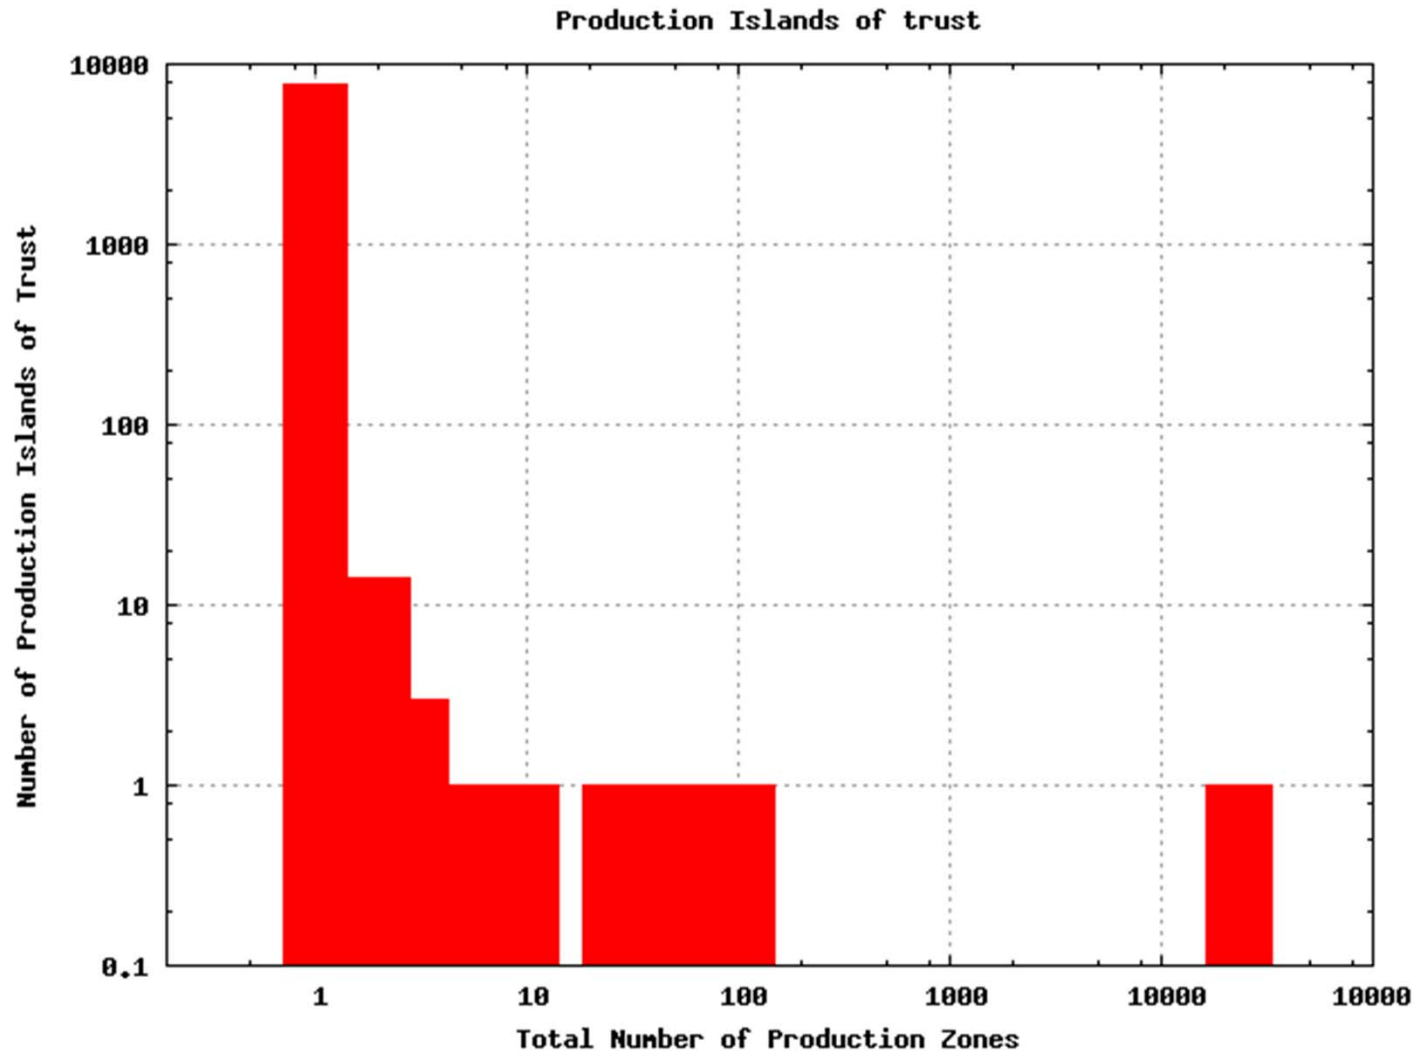
Note: there are millions of DNS servers in the world. So we aren't there yet.

Eric Osterwiel, Dan Massey, Lixia Zhang http://secspider.cs.ucla.edu/

A few open questions

- Models to understand IPv6 deployment & IPv4 address allocation
  - Descriptive models to understand the market failure
  - Conversion/incompatibility interaction with network structure (graphs)?
  - Two sided markets that create incentives for IPv6 adoption?
  - Auctions for IPv4 address space?
  - Effects of IPv4 scarcity on adoption?

- Non-local network externalities?
  - More realistic models of the network externality that map accurately to BGPsec and IPv4 deployment
  - Characterizing equilibria with certain graphs or threshold models

- Descriptive models of DNSSEC & RPKI deployment
  - Way to leverage or avoid dependence on hierarchy? Interactions with resolvers?

Thanks!

http://arxiv.org/abs/1202.2928